



由 Autodesk 教育版产品制作


REV	DATE	BY	DESCRIPTION
01	2012/07/05	Teng	
02	2012/08/17	Teng	

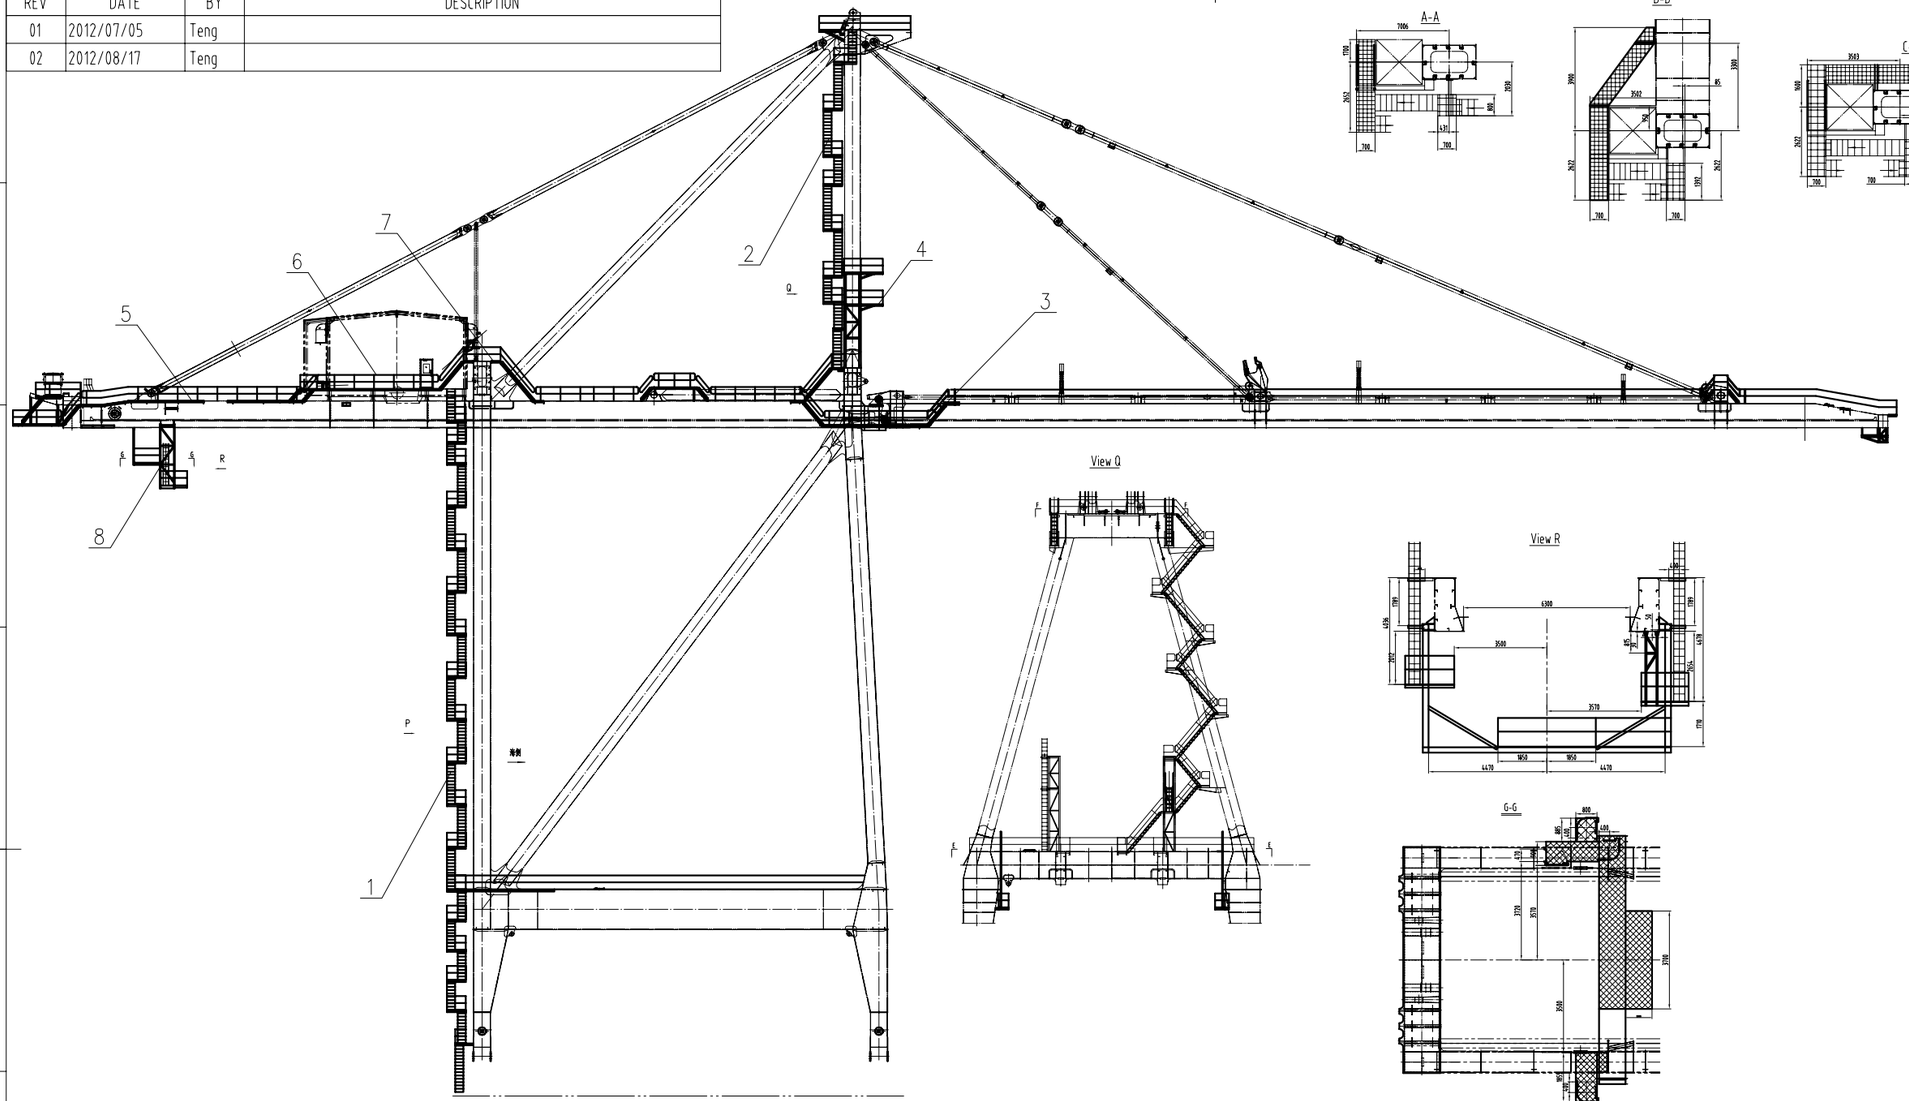


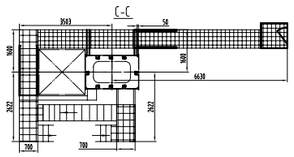

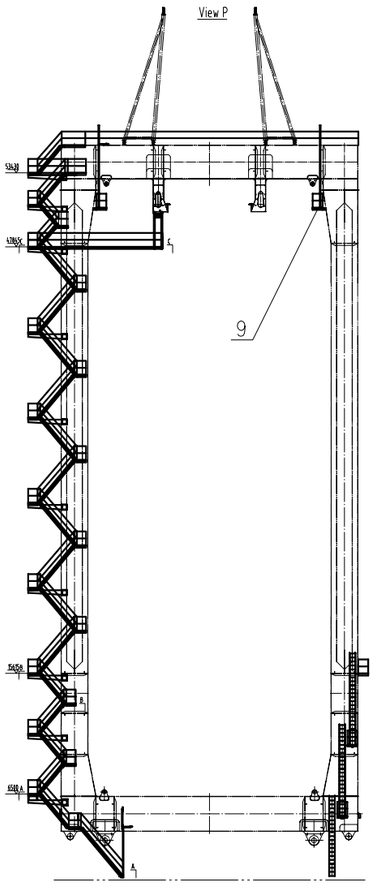

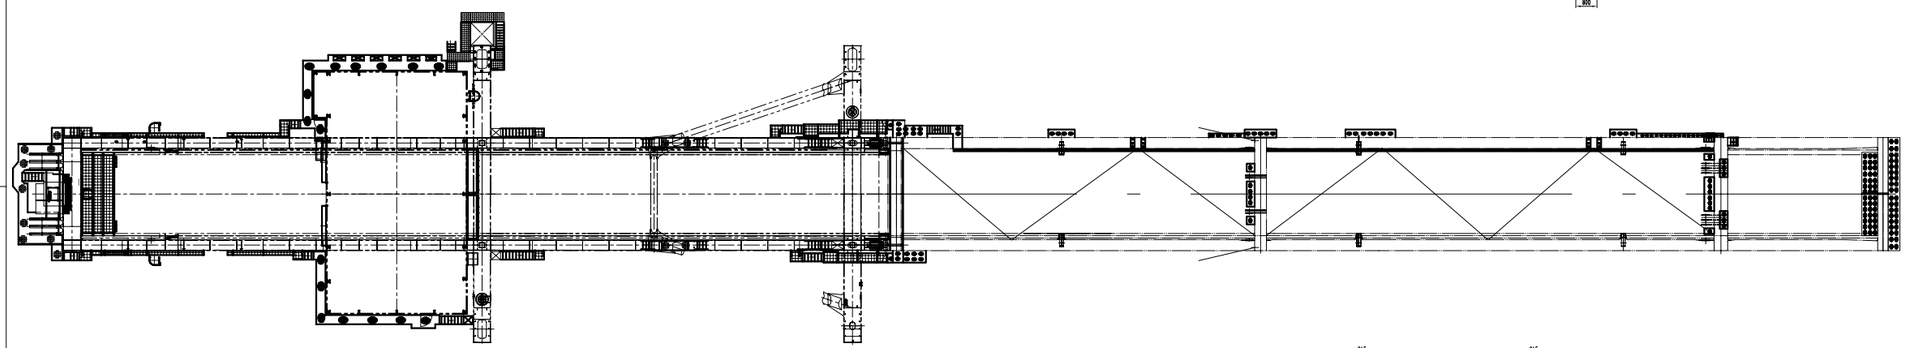

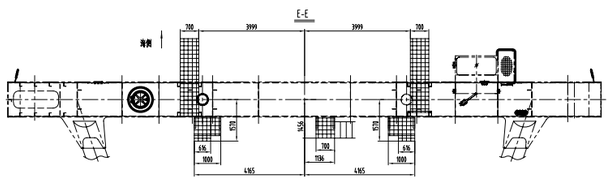


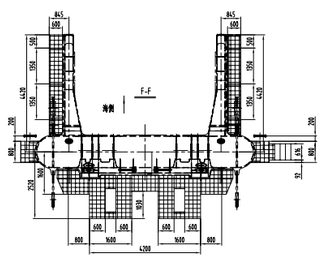

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	WEIGHT each	WEIGHT total	NOTE
9	J526A5009	门架上法兰处平台 platform at upper flanges on frame		1		1230	
8	J526A5008	电缆卷筒及司机室通往操子平台 Festoon & Cab service platform		1		3046.2	
7	J526A5007	陆侧上拽架梯子平台 Platform of L.S TGSB		1		671.4	
6	J526A5006	机器房梯子平台 Platform of M. House		1		2755	
5	J526A5005	后大梁梯子平台 Platform of girder		1		9515	
4	J526A5004	海侧上拽架梯子平台 Platform of W.S TGSB		1		3243	
3	J526A5003	前大梁梯子平台 Platform of Boom		1		7201	
2	J526A5002	海侧转架梯子平台 Platform of APEX		1		5925	
1	J526A5001	门架梯子平台 Platform of frame		1		13700	

工号/JOB NO.	ZP12-1873	项目名称/PROJECT	SriLanka CICT 12 STS Cranes		
设计/DSGN	校对/CHKD	审核/EXAM	审定/APPD	图幅/FORMAT	A1
日期/DATE	日期/DATE	日期/DATE	日期/DATE		
材料/MAT	比例/SCALE	图名/DRAWING NAME	梯子平台总图 Platform and stairs		
单重/WEI (Kg)	47287				
上海振华重工集团 ZPMC		图号/DRAWING NO.	J526A5000	版本/REV	页号/PAGE

由 Autodesk 教育版产品制作

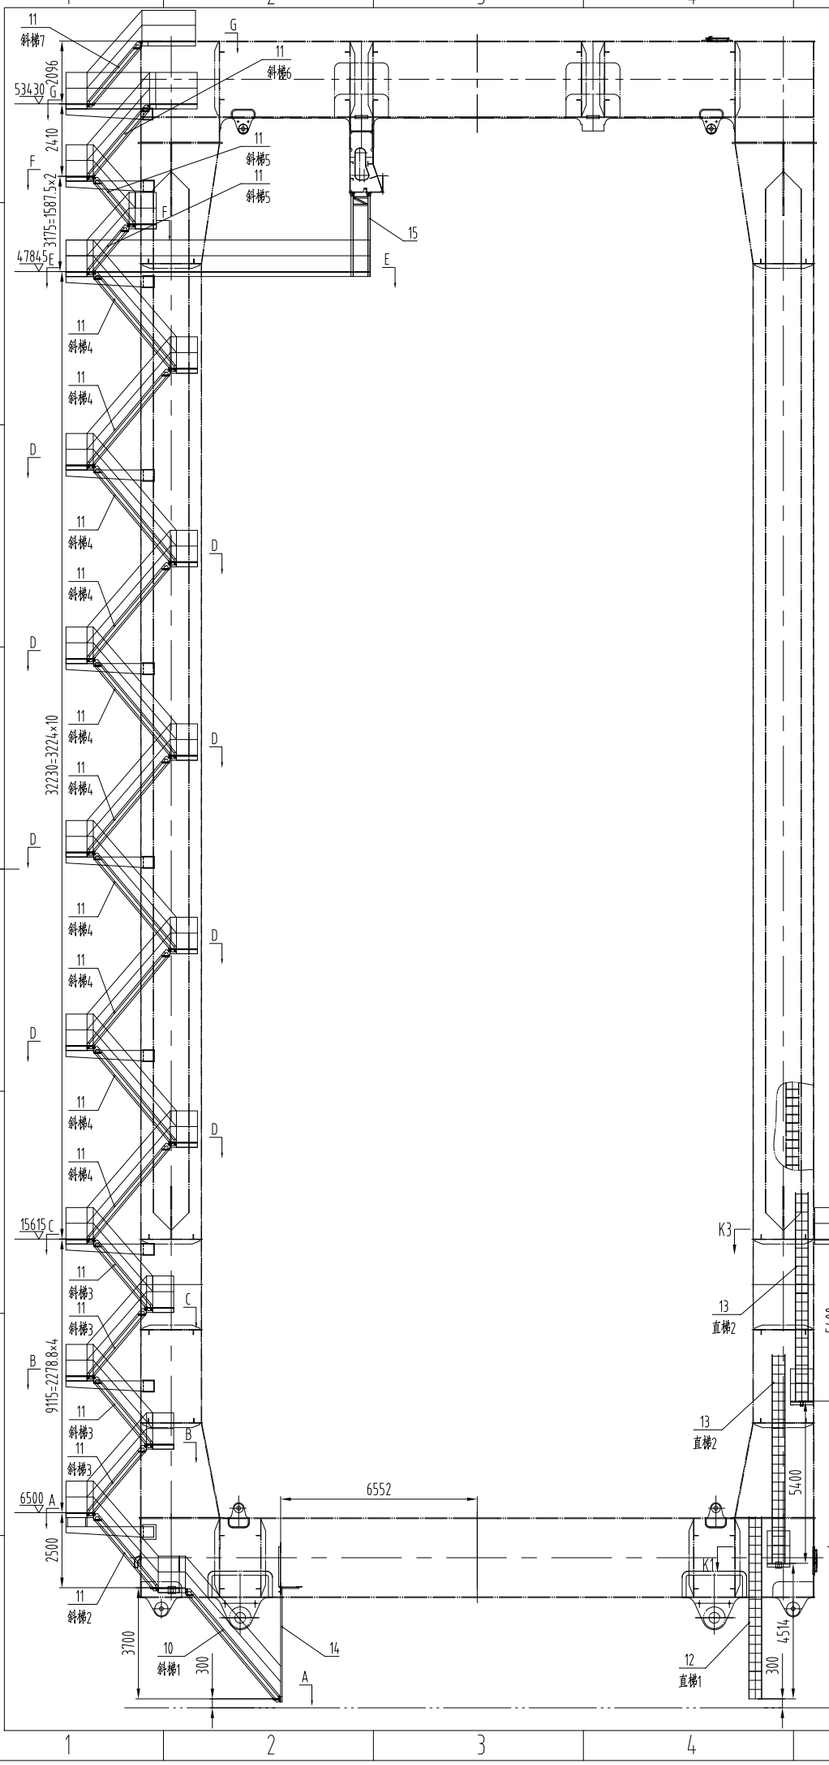

技术要求

1. 长平台可根据工艺需要，分段制作;
2. 作为走道的钢接构表面涂防滑漆;
3. 未标注焊缝全部为连续角焊缝，焊高为薄板厚度的0.7倍;
4. M16 连接螺栓的拧紧力矩均为??Nm;
5. 拧紧后外露表面须按项目油漆工艺涂油漆。


Technical requirements:

1. Long platforms can be made into subsections in necessary.
2. The walkway surface of structure shall be painted with anti-slip painting.
3. All the welds are continuous fillet welds and the weld leg is 0.7 times of the thickness of the thinner plate except those marked.
6. The tighten torque of M16 bolt: ?? Nm;
7.Exposed surface of bolts & nuts portion shall be pained after tighten according to the painting procedure for each prject.


登机直梯安装示意

NO.	SUB-NO. OR STDD	VER	NAME & SIZE	MTRL	QTY	EACH	TOTAL	NOTE
	J526A500121	0	栏杆走向 Rail Arrangement	部件Ass.	1		2649.2	
	J526A500120	0	格栅板 Grating Arrangement	部件Ass.	1		1480.9	
	J526A500119	0	护网 Net	焊接件Wel.	1		1041.3	
34			-8×80-280	Q235A	2			
33			L63×63×5-2000	Q235A	2			
32	J526A500122		警告牌		1			
31	ZT2-033302-00		走道安全门	焊接件Wel.	1		19.5	82L1
30			L50×50×5-1566	Q235A	2	5.9	11.8	
29			矩形管 150×100×5 l=963 L-bar	Q235A	1		18.5	
28			L50×50×5-349	Q235A	2	1.3	2.6	
27			三角板(t=6)	Q235A	1		4.0	[14a
26			[14a-573	Q235A	2	8.3	16.6	[14a
25			[14a-400	Q235A	1		5.8	[14a
24			[14a-801	Q235A	1		11.6	[14a
23			-5×130×40	Q235A	2	0.2	0.4	
22			[14a-200	Q235A	2	2.9	5.8	[14a
21			L50×50×5-1942	Q235A	2	7.3	14.6	
20			L50×50×5-1581	Q235A	2	6	12	
19			[80×40×5-300	Q235A	4	1.7	6.8	定制
18	J526A500118	0	牛腿及与门框联接 surpport	组件Ass.	2		252.8	
17	J526A500117	0	牛腿及与门框联接 surpport	组件Ass.	8		1034	
16	J526A500116	0	牛腿及与门框联接 surpport	组件Ass.	1		173.7	
15	J521A500115	0	跳水平台桁架 support	组件Ass.	1		94.4	
14	J526A500114	0	登机斜梯踏足 boarding stair and platform	组件Ass.	1		128.3	
13	J526A500113	0	直梯2 ladder2	组件Ass.	2		436.6	
12	J526A500112	0	直梯1 ladder1	组件Ass.	1		178.6	
11	J526A500111	0	斜梯2-8 stair2-8	组件Ass.	1		3505.1	
10	J526A500110	0	斜梯1 stair 1	组件Ass.	1		296.8	
9	J526A500109	0	平台9-13 Platform	组件Ass.	1		861.4	
8	J526A500108	0	平台8 Platform	组件Ass.	1		92.3	
7	J526A500107	0	平台7 Platform	组件Ass.	1		33.8	
6	J526A500106	0	平台6 Platform	组件Ass.	1		45.6	
5	J526A500105	0	平台5 Platform	组件Ass.	1		115.9	
4	J526A500104	0	平台4 Platform	组件Ass.	6	55.4	332.4	
3	J526A500103	0	平台3 Platform	组件Ass.	7	85.3	597.1	
2	J526A500102	0	平台2 Platform	组件Ass.	1		96	
1	J526A500101	0	平台1 Platform	组件Ass.	1		120	


设计/DSGN		校对/CHKD	图幅/FORMAT A1
日期/DATE		日期/DATE	
材料/MAT	部件Ass.	比例/SCALE	图名/DRAWING NAME
单重/WEI	13700kg	1:100	门框梯子平台 Access of Frame
审核/Sign	ZPMC 上海振华港机公司	图号/DRAWING NO.	版本/REV 0 / 页号/PAGE 1/1
		J526A500100	

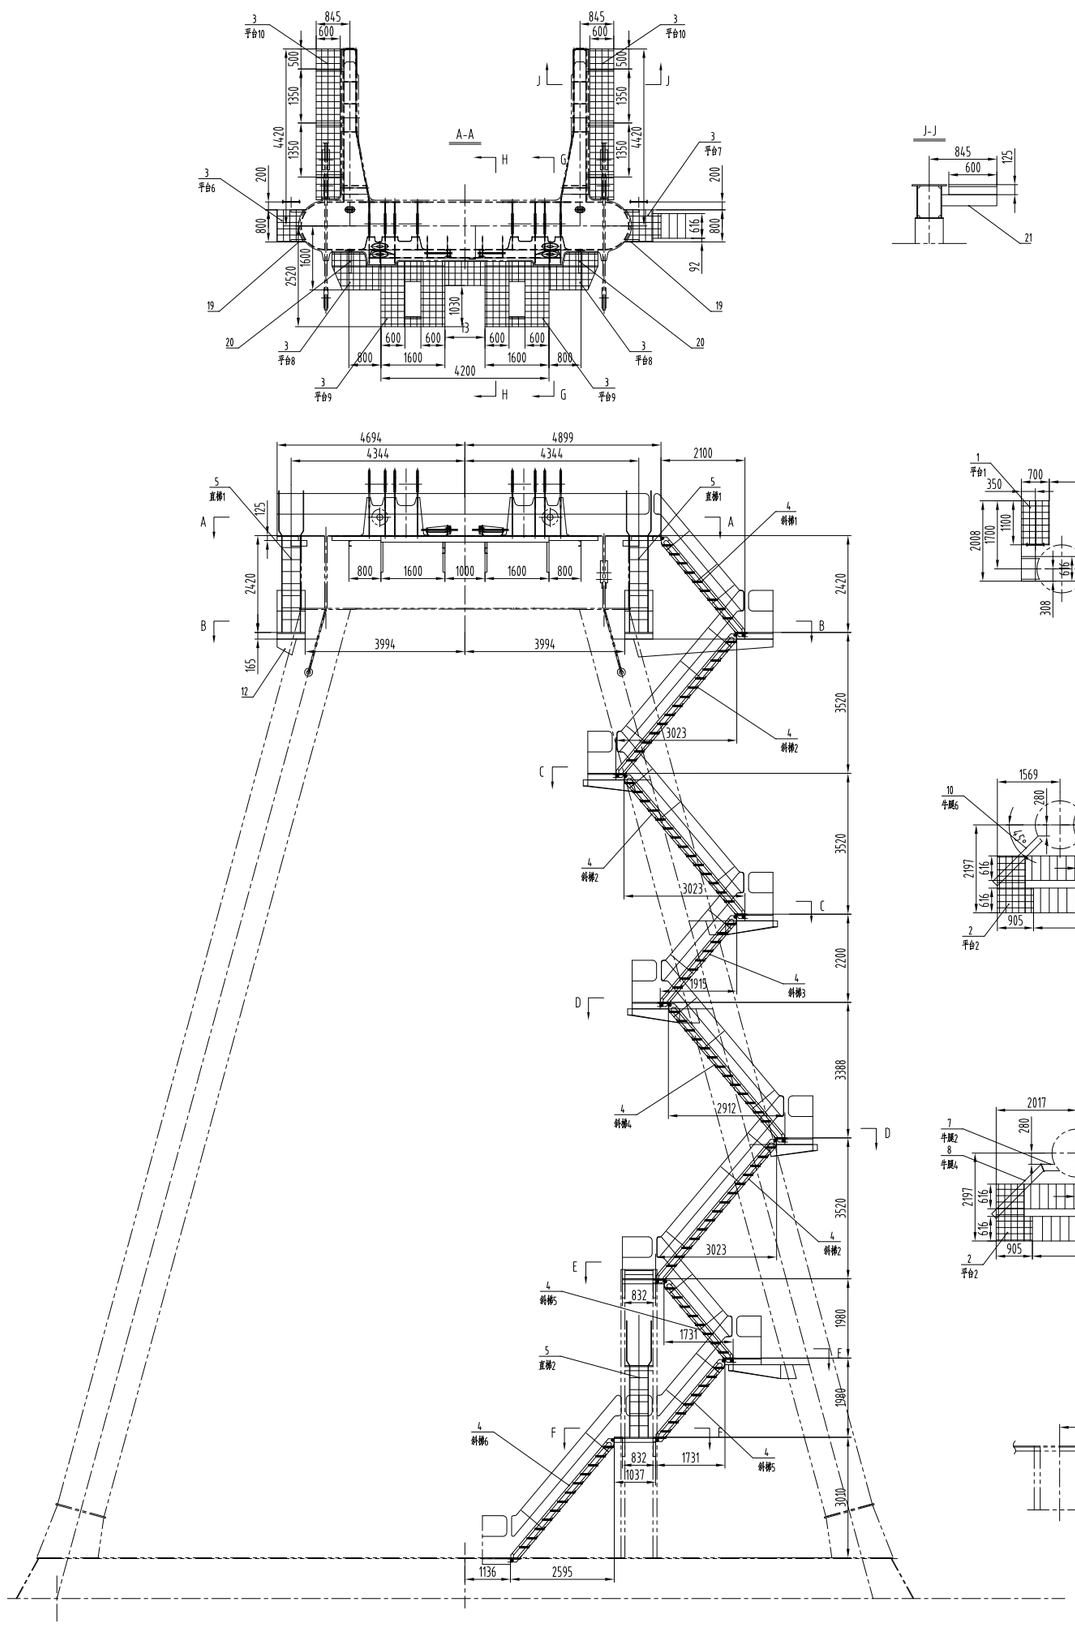


件13 (共2件)
1:5



件14 (共2件)
1:5



件12
共2件(对称)



技术要求:

1.海侧梯形架平台现场按图排列拼装
2.所有平台均用[100×50×5槽钢,-5×50扁钢制作.
3.作为走道的大梁表面涂防滑漆
4.全部连续焊

technical requirment

1. All platforms should be assembled according to the drawing.
2. All the platforms are made of [100×50×5 and -5×50.
3. As walkway on structure surface should be covered with anti-slip paint.
4. All welding is continuous


注:明细表内材料为本图平台,栏杆之汇总


Note:quantity in the bill is the totally quantity of material shown in this drawing.

			焊缝重 solder weight	按技术要求	1	145	145	钢材总重×2.5%
27	J526A500211	0	栏杆走向布置 handrail	部件Ass.	1	939	939	
26	J526A500210	0	梯形架平台镀模板布置	焊接件Wel.	1	755	755	
25	J526A500209	0	罩壳	焊接件Wel.	2	18	36	
24		0	L63×63×6-1054	Q235-A	2	6	12	
23		0	L63×63×6-1203	Q235-A	1	6.9	6.9	
22		0	[14a-477	Q235-A	1	6.9	6.9	
21		0	[14a-690	Q235-A	6	10	60	
20		0	[14a-580	Q235-A	2	8.4	16.8	
19		0	[14a-400	Q235-A	4	5.8	23.2	
18		0	[14a-890	Q235-A	2	3.4	6.8	
17		0	L100×50×5-100	Q235-A	2	0.75	1.5	
16		0	[14a-390	Q235-A	2	5.7	11.4	
15		0	[140×50×5-1677	Q235-A	4	15	60	
14		0	板(t=12)	Q235-A	2	4.4	8.8	本图 current
13		0	板(t=12)	Q235-A	2	4.8	9.6	本图 current
12		0	三角板(t=8)	Q235-A	2	11.3	22.6	本图 current
11	J526A500208	0	牛腿(7) support	焊接件Wel.	1	61	61	
10	J526A500207	0	牛腿(6) support	焊接件Wel.	1	63	63	
9	J526A500206	0	牛腿(5) support	焊接件Wel.	1	165	165	
8	J526A500205	0	牛腿(4) support	焊接件Wel.	3	85	255	其中一件对称
7	J526A50-NT020103	0	牛腿(2)~(3) support	焊接件Wel.	1	52	52	
6	J526A50-NT020104	0	牛腿(1) support	焊接件Wel.	1	28	28	
5	J526A500204	0	直梯(1)~(2) Stairs	部件Ass.	1		383	共3部直梯
4	J526A500203	0	斜梯(1)~(6) Stairs	部件Ass.	1		1767	共9部斜梯
3	J526A500202	0	平台(3)~(10) platform	部件Ass.	1	625.3	625.3	
2	J526A500201	0	平台(2) platform	部件Ass.	5	55.9	279.5	
1	J526A50-PT020305	0	平台(1) platform	部件Ass.	2	62.3	124.6	其中1件对称制作
NO.	SUB-NO. OR STDD	VER	NAME & SIZE	MTRL	QTY	EACH	TOTAL	NOTE

设计/DSGN 沈晓林	校对/CHKD		图幅/FORMAT A1
审核/DATE	审批/DATE		
材料/MAT 部件Ass.	比例/SCALE	图名/DRAWING NAME 梯形架梯子平台 platform of A frame	
重量/WEI 5925 kg			
绘图/Sign	ZPMC 上海振华港机公司	图号/DRAWING NO. J526A500200	版本/REV 0 / 页号/PAGE 1

010203

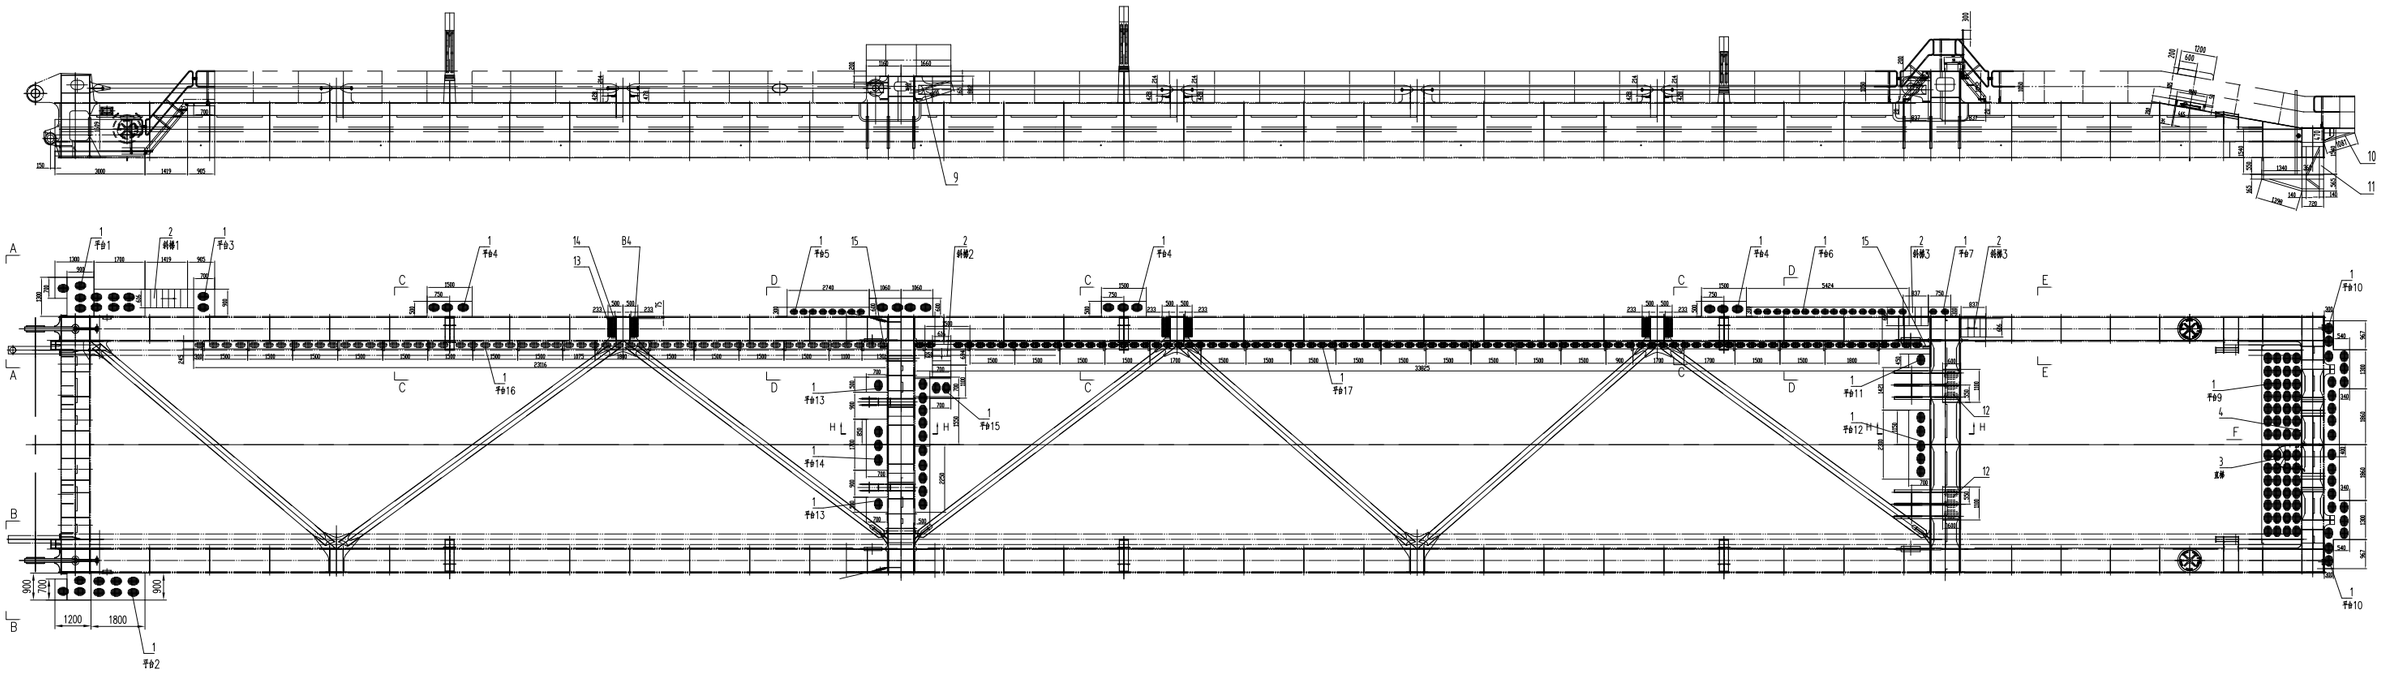

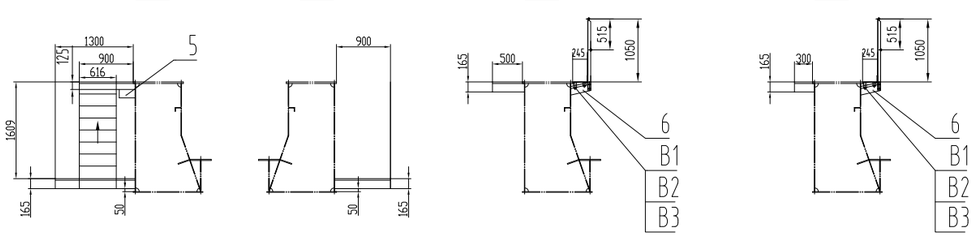



Technical requirements:


1.Access is assembled according to the drawing, long platforms can be made in subsections according to technical requirement;
2.All platforms are made of channel steel [140*50*5,angle steel L50*50*5,flat bar -5*50 etc.;
3.Toeboards -5*100/125 is assembled where there are handrails;
6.Structure surface that is used as walkway is painted with anti-slip points;
5.The unmarked welds are all continuous, weld leg is 0.7 time the thickness of plate;
6.The tighting torque of M16 bolts is 79Nm.
7. After the bolt screws tight, spreads the paint according to the paint craft.


NO.	SUB-NO. OR STDD	VER	NAME & SIZE	MTRL	QTY	EACH(Kg)	TOTAL(Kg)	NOTE
B7	GB/T95-85		平垫圈 16 Washer	100HV	8			'Dacro '
B6	ZN6175-T-SL		六角凸缘自锁防松螺母 M16 Nut	08H	8			'Dacro '
B5	GB5783-86		螺栓 M16×50 Bolt	8.8	8			'Dacro '
B4	T-600H-238		(斜梯)格栅踏步 Tread	组件 Unit	6		39	热浸锌
B3	GB/T95-85		平垫圈 14 Washer	100HV	104			'Dacro '
B2	ZN6175-T-SL		六角凸缘自锁防松螺母 M14 Nut	08H	76			'Dacro '
B1	GB5783-86		螺栓 M14×45 Bolt	8.8	76			'Dacro '
20			-5x800x1160	Q235-A	2	33.3	66.6	
19			-8x50x75	Q235-A	8		1.7	
18			-8x80x175	Q235-A	8	0.9	7.2	
17	J526A500307	0	栏杆布置 Handrail Arrangement	部件Ass.	1		2724	
16	J526A500306	0	格栅板布置 Grating Arrangement	部件Ass.	1		1009	
15	GB9787-88		角钢 50x50x5 l=256 L-bar	Q235-A	2		1.93	
14			-8x50 l=152 L-bar	Q235-A	6		1.38	
13	GB9787-88		角钢 50x50x5 l=152 L-bar	Q235-A	6		3.44	
12	J526A500305	0	花纹板踏步 Riffled plate	部件Ass.	2		170.4	
11	J526A500304		支架 Suppor	部件Ass.	1		65.4	
10	GB9787-88		角钢 63x63x6 l=1013 L-bar	Q235-A	2		22.57	
9	GB9787-88		角钢 75x50x5 l=1291 L-bar	Q235-A			12.4	
8	GB707-88		槽钢 140×58×6.0 l=715 U-bar	Q235-A	4		41.47	
7	GB9787-88		角钢 75x50x5 l=1189 L-bar	Q235-A	4		22.8	
6	GB707-88		槽钢 140×58×6.0 l=372 U-bar	Q235-A	38		205	
5	GB707-88		槽钢 140×58×6.0 l=265 U-bar	Q235-A	2		7.68	
4	ZT1-00030(01)	0	警告牌1 Nameplate	0Cr19Ni9	1		1.6	'JGP-1 '
3	J526A500303	0	直梯 ladder	焊接件Wel.	1		93.3	
2	J526A500302	0	斜梯1~4 Stairs	组件Ass.	6		316.3	
1	J526A500301	0	平台1~17 Platform	组件Ass.	21		2464	平台8取消

工号/JOB NO.	zp12-1873	项目名称/PROJECT Slilanka CICT12 STS Cranes
设计/DSGN 设计	校对/CHKD 校对	审核/EXAM 审核	审定/APPD 审定	图幅/FORMAT 图幅
日期/DATE 设计时间	日期/DATE	日期/DATE	日期/DATE	
材料/MAT 材料	比例/SCALE 比例	图名/DRAWING NAME 前大梁平台 platform of boom		
单重/WEI(Kg) 7201KG				
制作标准/Copy	ZPMC 上海振华重工集团	图号/DRAWING NO. J526A5003	版本/REV 版本	页号/PAGE 页号

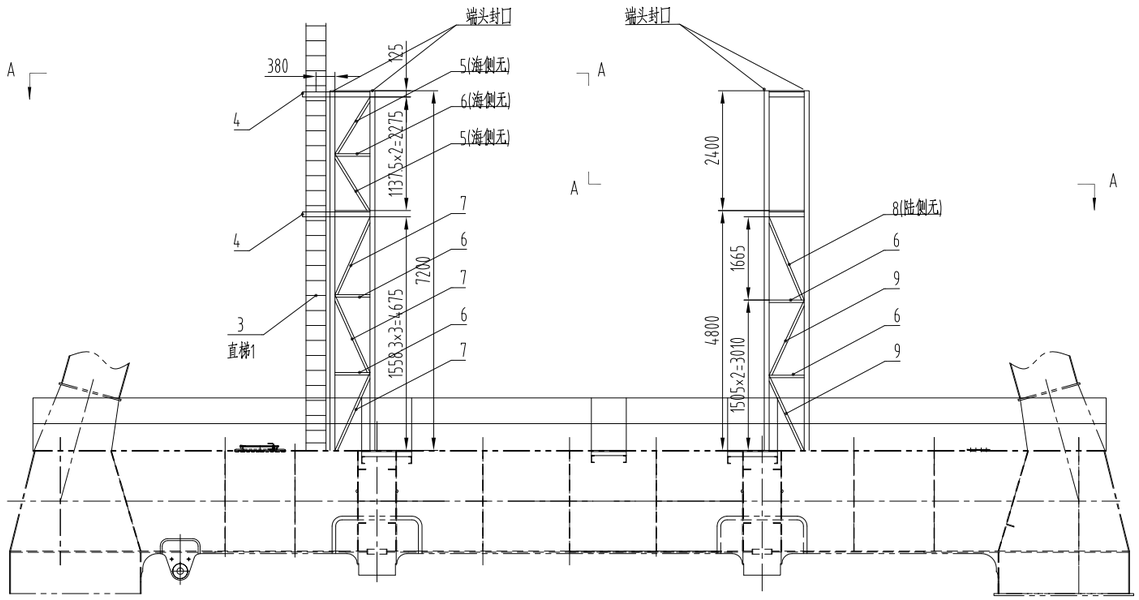

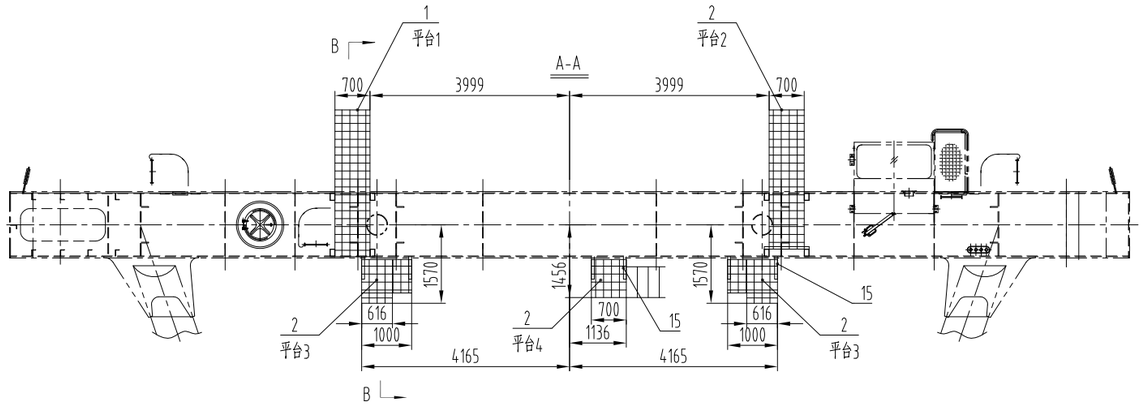

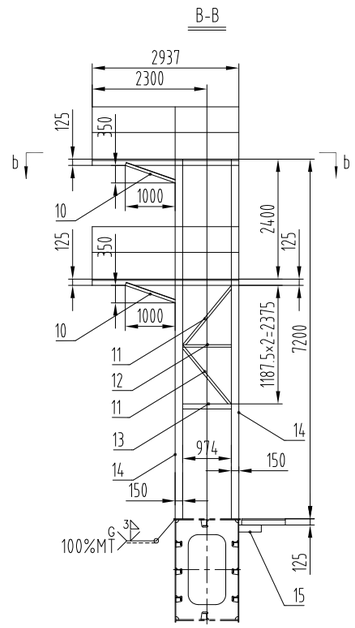

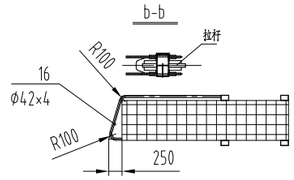

注:明细表内材料为本图平台,栏杆,之汇总

Note:quantity in the bill is the totally quantity of material shown in this drawing.

			焊缝重 solder weight	按技术要求	1	79	79	钢材总重 ×2.5%
18	J526A500404	0	栏杆走向布置 handrail	部件Ass.	1	844	844	
17	J526A500403	0	格栅板布置	部件Ass.	1	331	331	
16		0	焊接管 φ42.3×4 l=2800 Welded pipe	Q235-A		11.7	23.4	
15		0	[140×50×5 l= 450	Q235-A	6	4	24	
14	GB/T6728-86	0	矩形空心型钢 150×100×5 l=7200	Q235-A	8	130	1040	
13		0	[100×50×5 l= 974	Q235-A	4	7.3	29.2	
12		0	L50×50×5 l= 974	Q235-A	4	3.7	14.8	
11		0	L50×50×5 l= 1536	Q235-A	8	5.8	46.4	
10		0	L63×63×6 l= 1060	Q235-A	8	6	48	
9		0	L50×50×5 l= 1660	Q235-A	4	6.3	25.2	
8		0	L50×50×5 l= 1806	Q235-A	1	6.8	6.8	
7		0	L50×50×5 l= 1708	Q235-A	6	6.4	38.4	
6		0	L50×50×5 l= 700	Q235-A	9	2.6	23.4	
5		0	L50×50×5 l= 1336	Q235-A	2	5	10	
4		0	[100×50×5 l=650	Q235-A	2	4.9	9.8	
3	J526A500402	0	直梯(1) Ladder	焊接件Wel.	1	285	285	
2	J526A500401	0	平台(2)~(4) platform	部件Ass.	1	155	155	
1	J526A50-PT040202	0	平台(1) platform	部件Ass.	3	65	195	
NO.	SUB-NO. OR STDD	VER	NAME & SIZE	MTRL	Q'TY	EACH(Kg)	TOTAL(Kg)	NOTE

设计/DSGN		校对/CHKD	图幅/FORMAT
日期/DATE		日期/DATE	
材料/MAT	比例/SCALE	图名/DRAWING NAME	海侧上横梁梯子平台 platform on seaside upper beam
单重/WEI	3243kg		
修改标志/Sign	ZPMC 上海振华港机公司	图号/DRAWING NO.	J526A500400
		版本/REV	页号/PAGE

技术要求:

1.海侧梯形架平台现场按图排列拼装


2.所有平台均用[100×50×5槽钢,-5×50扁钢制作.


3.作为走道的大梁表面涂防滑漆


4.全部连续焊


technical requirment

1. All platforms should be assembled according to the drawing.
2. All the platforms are made of [100×50×5 and -5×50.
3. As walkway on structure surface should be covered with anti-slip paint.
4. All welding is continuous

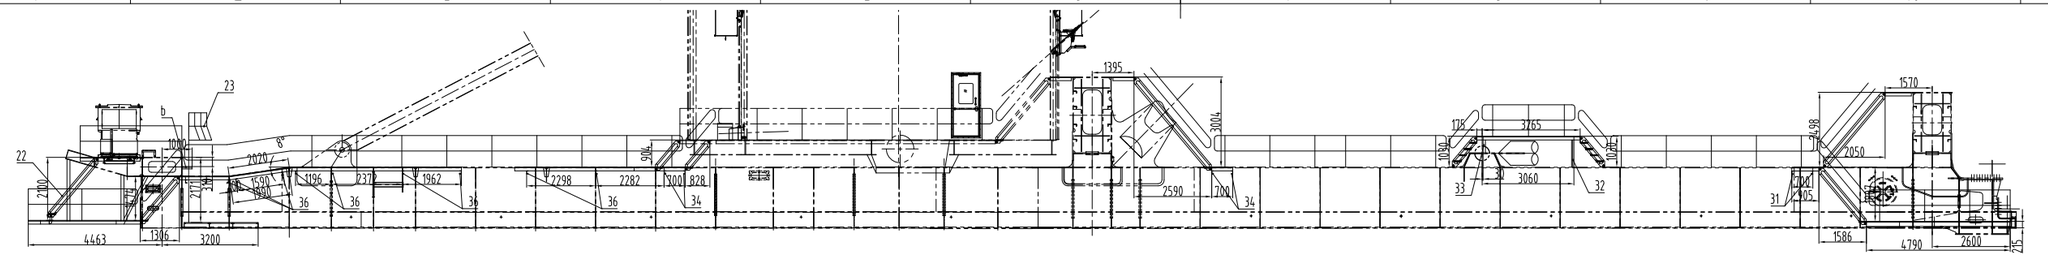

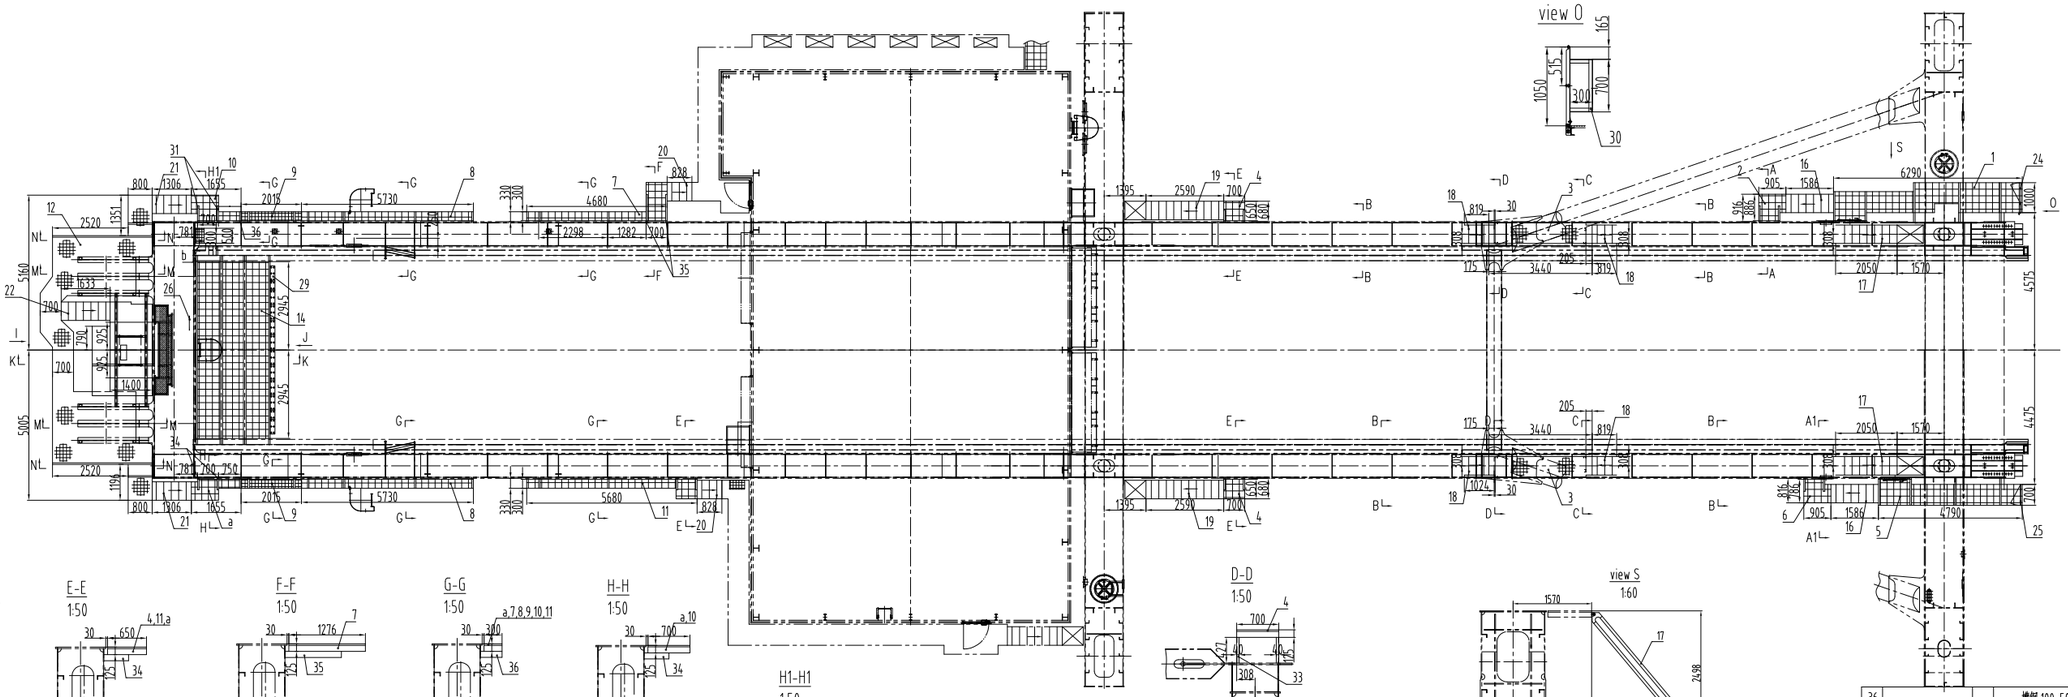

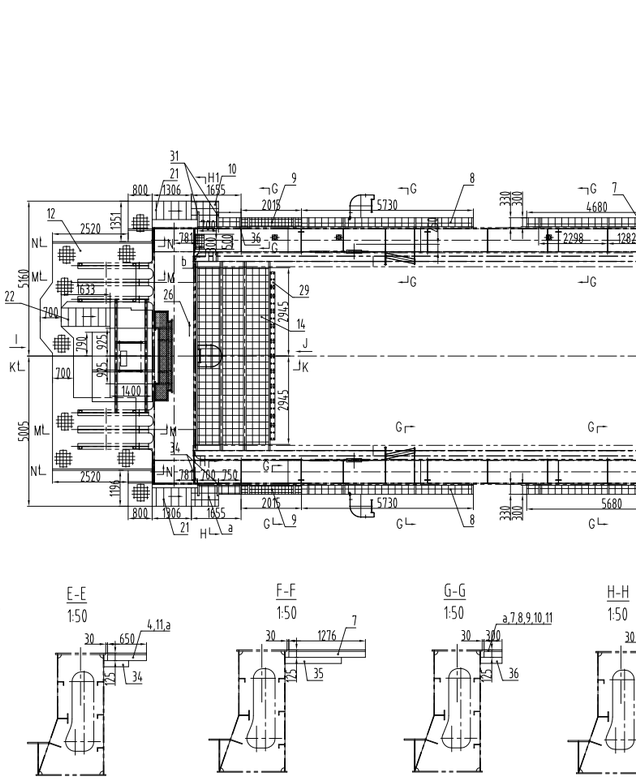

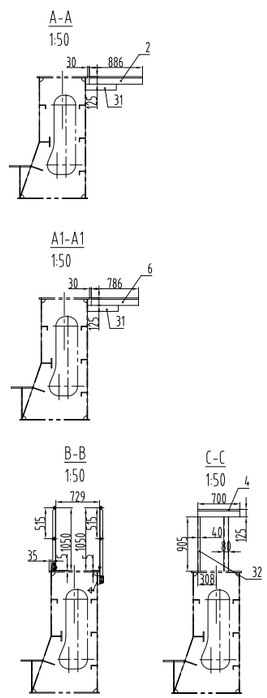

技术要求:

1.梯子平台按图装对拼装;

2.平台与格栅板接触面应平整,焊点高出部分需打磨平整;

3.未标注焊缝全部为连续焊,焊脚高度为板厚的0.7倍;

4.作为走道的钢结构表面涂防滑漆;


5.长平台可视建筑分段制作.


注:明细表内材料为本图栏杆,平台之材料汇总


36			槽钢 100×50×5 l=360 U-bar	Q235-A	18	2.7	48.6	'定制'
35			槽钢 100×50×5 l=930 U-bar	Q235-A	2	7	14	'定制'
34			槽钢 100×50×5 l=410 U-bar	Q235-A	8	3	24.6	'定制'
33			槽钢 80×40×5 l=427 U-bar	Q235-A	4	2.4	9.7	'定制'
32			槽钢 80×40×5 l=905 U-bar	Q235-A	4	5	20.6	'定制'
31			槽钢 100×50×5 l=510 U-bar	Q235-A	6	3.8	23	'定制'
30	J526A500515		走道安全门安装架	焊接件	Wel.	1	4.9	
29	J526A500514	0	抗磨装置	部件	Ass.	1	116.8	116.8	
28			不锈钢链条 ø5 l=800 Stainless chain	外购成品	Pur.	6	0	0	
27			不锈钢弹簧钩 ø6 Stainless spring hook	外购成品	Pur.	6	0	0	
26	JGP-1	0	警告牌1 Nameplate	0Cr19Ni9		1	1.6	1.6	'JGP-1'
25	ZT2-033302-00	0	走道安全门(倾斜轴)2 Door	组件	Assembly	1	18	18	右内开(72R1)
24	ZT2-033302-00	0	走道安全门(倾斜轴)2 Door	组件	Assembly	1	18	18	左内开(72L1)
23	J526A500513	0	直梯 Ladder	焊接件	Wel.	1		108	H=2171
22	J526A500512	0	斜梯 Stairs	焊接件	Wel.	1		134.9	H=2100
21	J526A500511	0	斜梯 Stairs	焊接件	Wel.	2			H=1474
20	J526A500510	0	斜梯 Stairs	焊接件	Wel.	2			H=904
19	J526A500509	0	斜梯 Stairs	焊接件	Wel.	2			H=3004
18	J526A500508	0	斜梯 Stairs	焊接件	Wel.	4		1599	H=1030
17	J526A500507	0	斜梯 Stairs	焊接件	Wel.	2			H=2498
16	J526A500506	0	斜梯 Stairs	焊接件	Wel.	2			H=1807
15	J526A500505	0	液压管路保护平台 Platform to be protected	组件	Ass.	1	72	72	
14	J526A500504	0	平台14 Platform 14	焊接件	Wel.	1	54.9	54.9	
13	J526A500503	0	平台13 Platform 13	焊接件	Wel.	1	234.9	234.9	
12	J526A500502	0	平台12 Platform 12	焊接件	Wel.	1	572.9	572.9	
1~11	a,b J526A500501	0	平台1~11,a,b Platform	组件	Ass.	1	1103.8	1103.8	
NO.	SUB-NO. OR STDD	VER	NAME & SIZE	MTRL		QTY	EACH	TOTAL	NOTE
	J526A500518		栏杆 Handrail Arrangement	部件	Ass.	1	2482.6	2482.6	
	J526A500517		格栅板 Grating Arrangement	部件	Ass.	1	204.7	204.7	
40	J526A500516	0	支架 Support	焊接件	Wel.	1	52.7	52.7	
39			槽钢 80×40×5 l=1811 U-bar	Q235-A		4	10.3	41.3	'定制'
38	GB/T6728-2002		方管100×80×6 l=1544	Q235-A		4	23.1	92.6	
37	GB/T6728-2002		方管100×80×6 l=2065	Q235-A		4	31	124	


设计/DSGN		校对/CHKD		图幅/FORMAT	A1
审核/CHKD		审定/DATE			
材料/MAT	部件Ass.	比例/SCALE	1:100	图名/DRAWING NAME	后大梁梯子平台 Girde Platform
重量/WEI	9515kg				
修改记录/Description & Date		ZPMC 上海振华港机公司		图号/DRAWING NO.	J526A5005
				版本/REV	0
				页号/PAGE	1


010203

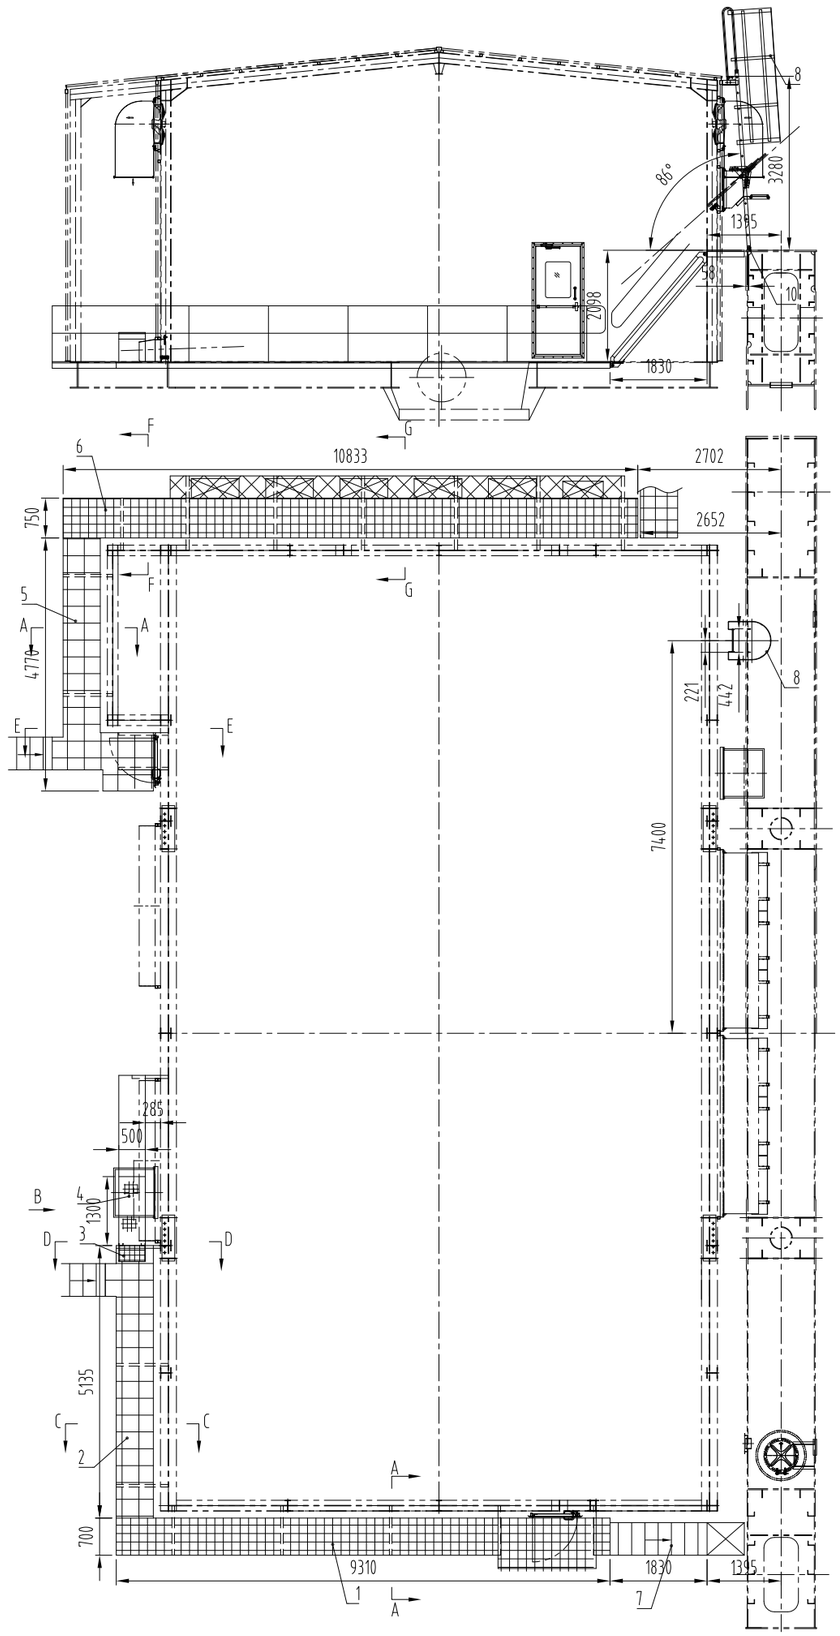








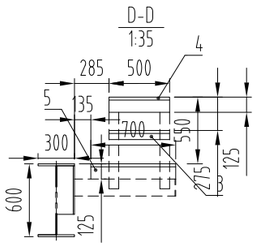


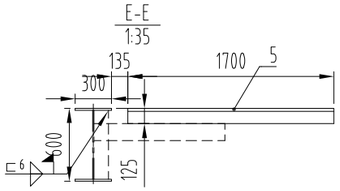




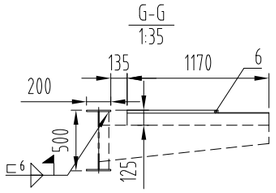

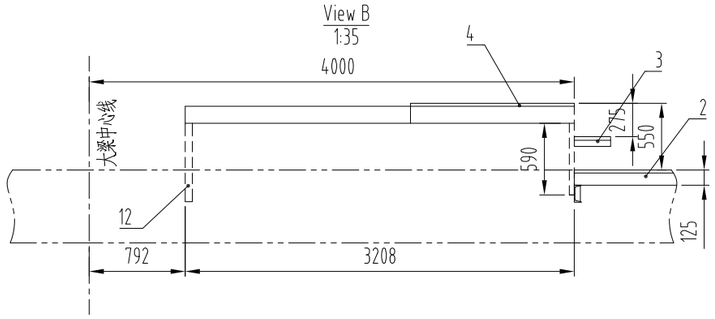





技术要求:

1.梯子平台按图排列拼装,长平台可根据工艺需要,分段制作;

2..有栏杆处设挡脚板;平台靠近机器房壁侧要安装挡脚板,两件挡脚板连板之间间距不超过1.5m;

3.平台与格栅板接触面应平整,焊点高出部分需打磨平整;

4.未标注焊缝全部为连续焊,焊脚高度为板厚的0.7倍;

Technical requirements:

1.Access is assembled according to the drawing, long platforms can be made in subsections according to technical requirement;


2.Toeboards is assembled where there are handrails; Toeboards near the machinery wall should be assembled.


3.he surface of platforms contacting grating should be flat,welds of the contacting surface should be grinded to be flat;

4.The unmarked Welds are all continuous, weld leg is 0.7 time the thickness of plate;

	J526A500606	0	栏杆走向 Railing		1	501.7	501.7	
	J526A500605	0	格栅板布置 Grating		1	764.4	764.4	
			不锈钢链条 φ5 l=800 Stainless chain	外购成品	Pur. 2	0	0	直梯口用
			不锈钢弹簧钩 φ6 Stainless spring hook	外购成品	Pur. 2	0	0	直梯口用
10	GB708-88		钢板 6 F=87×65 Armor plate	Q235-A	2	0.3	0.6	
9	J526A500604	0	平台支撑及支撑连板 Support		1	283.7	283.7	
8	J526A500603	0	直梯 Ladder		1	131.6	131.6	H=3280
7	J526A500602	0	斜梯 Stair		1	148.7	148.7	H=2098
1~6	J526A500601	0	平台1~6 Platform1~6		1	923.9	923.9	
NO.	SUB-NO. OR STDD	VER	NAME & SIZE	MTRL	Q'TY	EACH(Kg)	TOTAL(Kg)	NOTE

设计/DSGN	校对/CHKD	图幅/FORMAT	A2
日期/DATE	日期/DATE		
材料/MAT	比例/SCALE	图名/DRAWING NAME	机器房梯子平台 Platform of M.H
单重/WEI (Kg) 2755	1:80		
修改标志/Sign	ZPMC 上海振华重工集团	图号/DRAWING NO.	J526A5006
版本/REV	页号/PAGE		

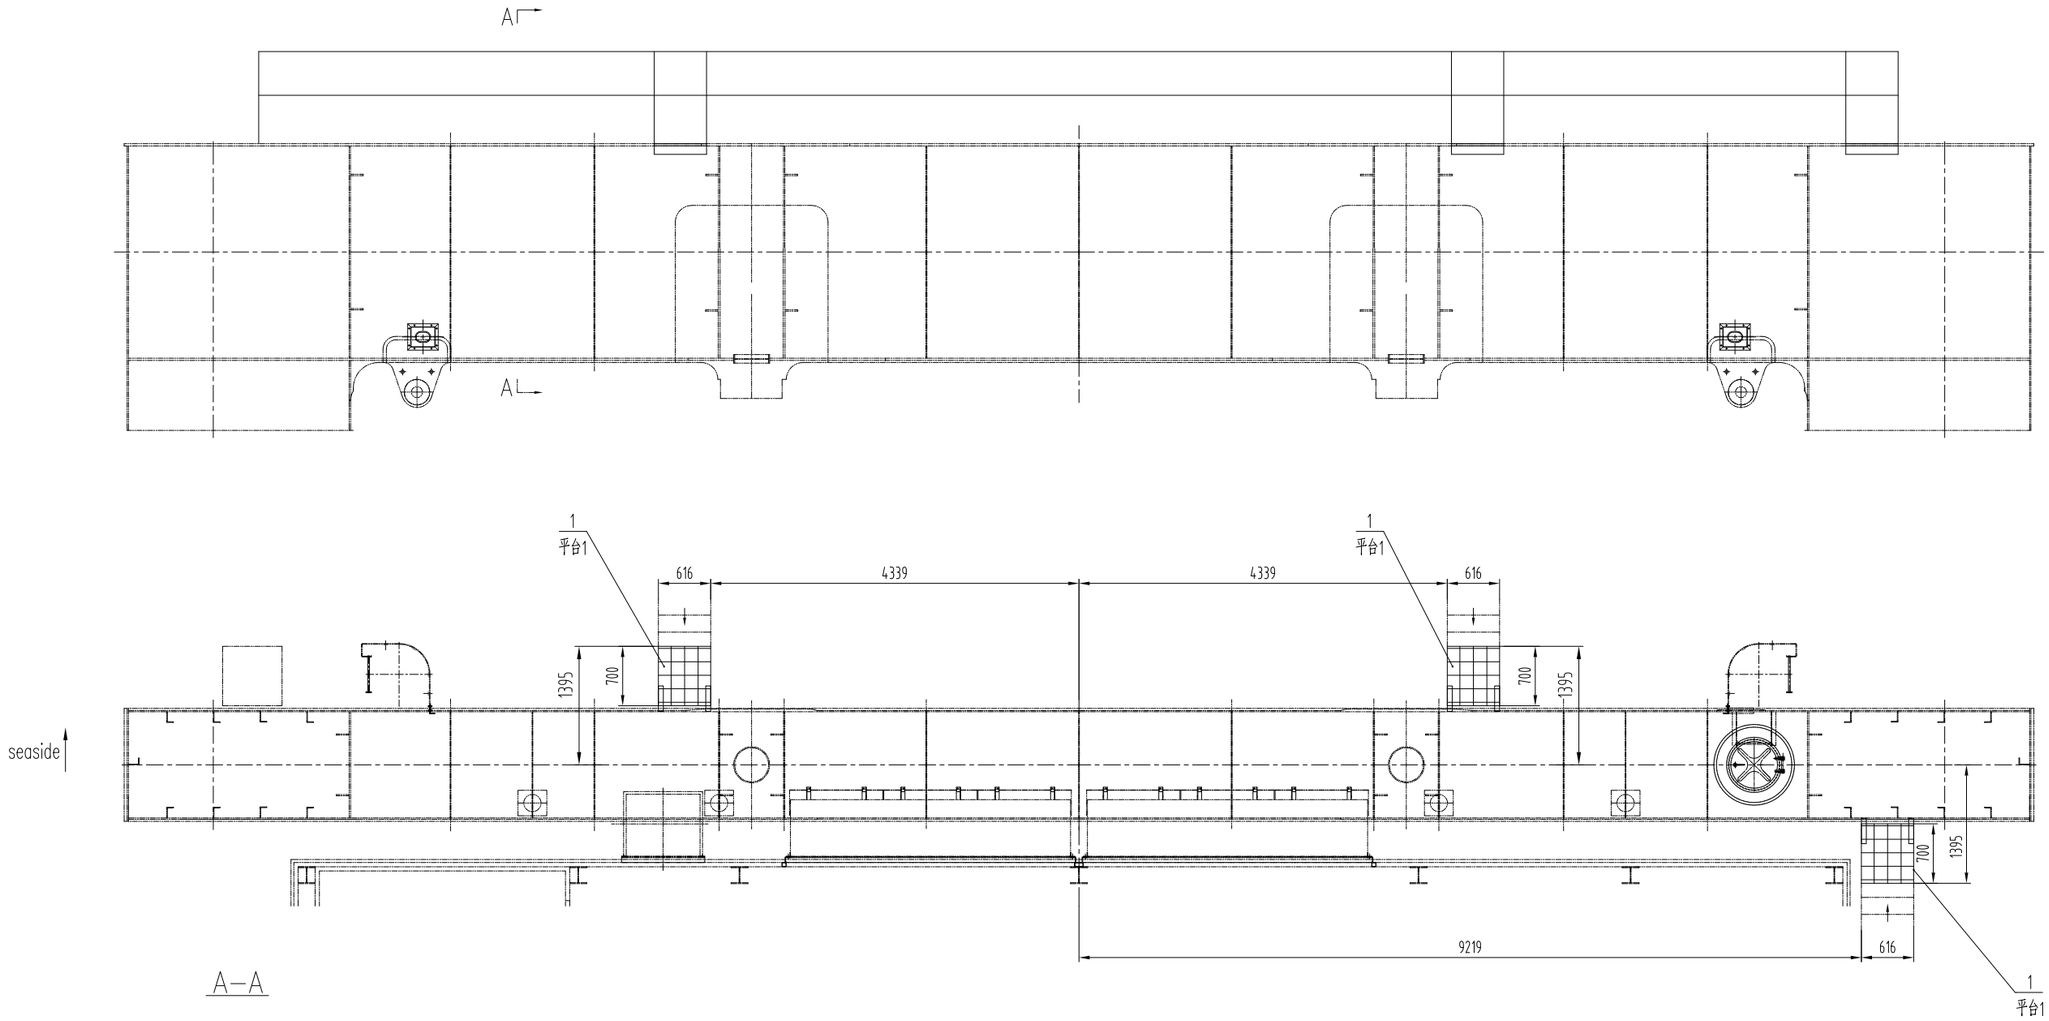

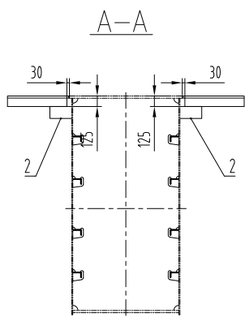

技术要求:

1.所有平台均用[100*50*5槽钢等制作;
2.有栏杆处设挡脚板;
3.平台与格栅板接触面应平整,焊点高出部分需打磨平整;
4.未标注焊缝全部为连续焊,焊脚高度为板厚的0.7倍;
5.作为走道的钢结构表面涂防滑漆;


Technical requirements:


1.All platforms are made of channel steel [100*50*5, etc.;
2.Toeboards is assembled where there are handrails;
3.The surface of platforms contacting grating should be flat,welds of the contacting surface should be grinded to be flat;
4.The unmarked Welds are all continuous, weld leg is 0.7 time the thickness of plate;
5.Structure surface that is used as walkway is painted with anti-slip paints;


NO.	SUB-NO. OR STDD	VER	NAME & SIZE	MTRL	QTY	EACH	TOTAL	NOTE
5			焊缝重 solder weight	按技术要求	1	11.0	11.0	钢材总重 ×2.5%
4	J526A500703	0	栏杆 Handrail Arrangement	组件Ass.	1	532.9	532.9	
3	J526A500702	0	格栅板 steel grating	组件Ass.	1	46.5	46.5	
2	GB707-88		槽钢 140×58×6.0 l=256 U-bar	Q235-A	6	3.7	22.2	
1	J526A500701	0	平台1 platform	组件Ass.	1	58.8	58.8	


更改记录/Description & Date	设计/DSGN		校对/CHKD		图幅/FORMAT
	日期/DATE		日期/DATE		A2
	材料/MAT 部件Ass.	比例/SCALE 1:50	图名/DRAWING NAME 陆侧上横梁梯子平台 platform of LS TGSB		
	单重/WEI 671.4				
修改标志/Sign	ZPMC 上海振华港机公司		图号/DRAWING NO. J526A5007	版本/REV 0	页号/PAGE 1


010203

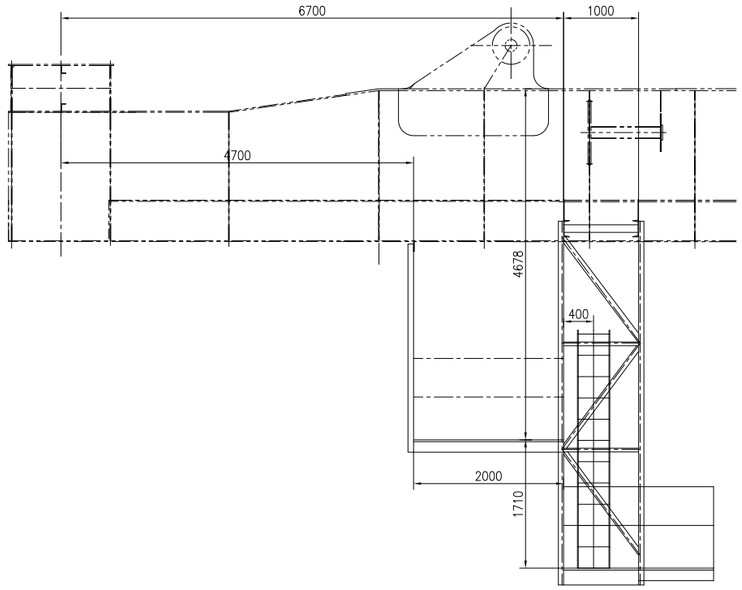

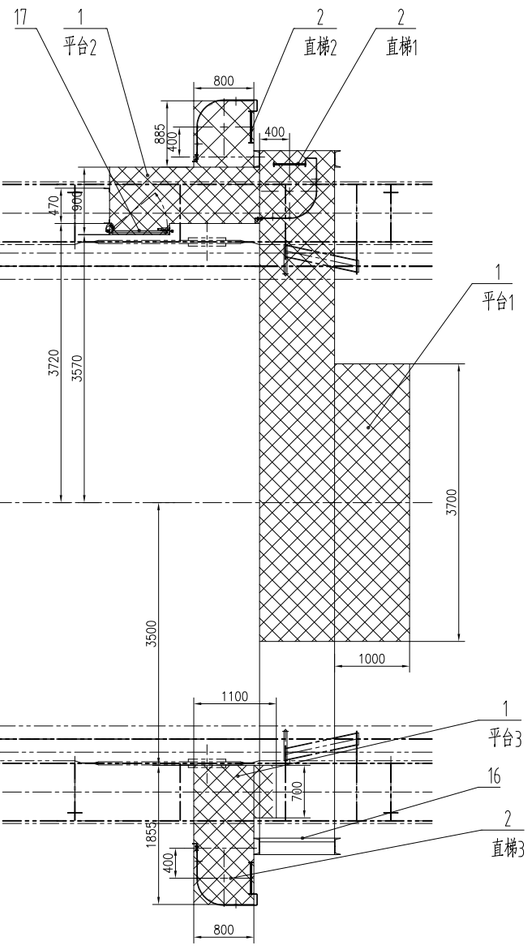


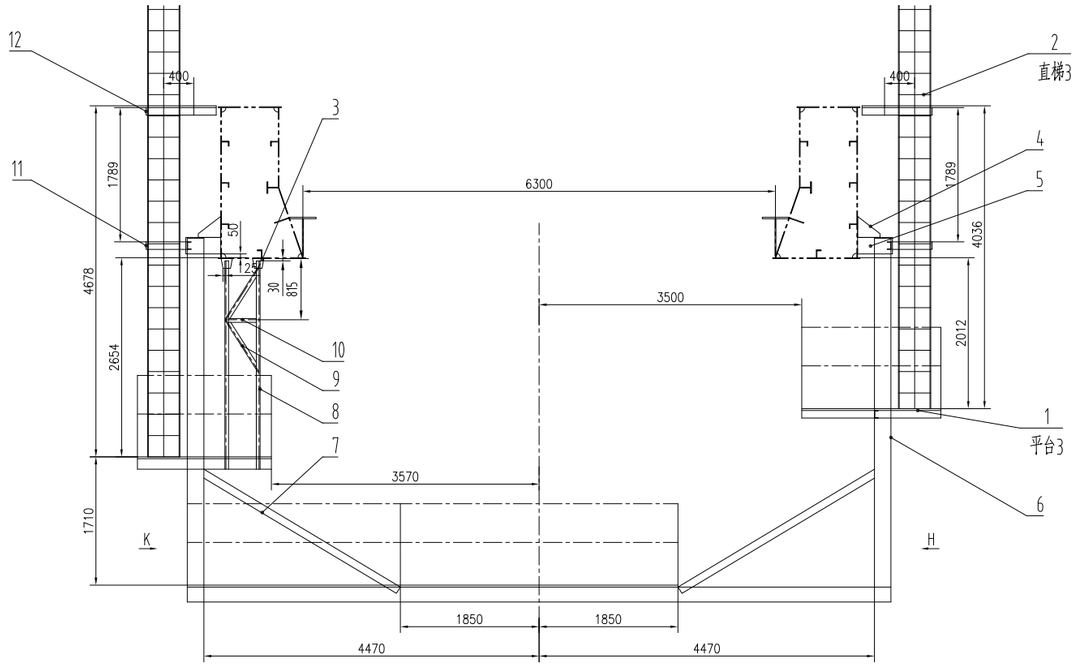






K veiw

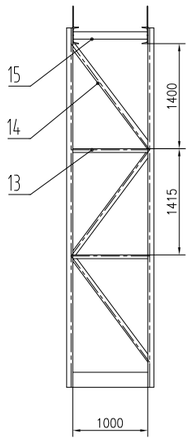

H veiw

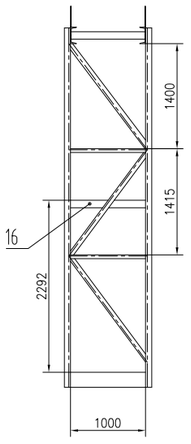

技术要求:

1.梯子平台按图排列拼装;
2.所有平台均用[140*50*5槽钢, -5*50扁钢等制作;
3.平台与格栅板接触面应平整,焊点高出部分需打磨平整;
4.未标注焊缝全部为连续焊.焊脚高度为板厚的0.7倍;
5.所有支撑与桥吊主体结构的焊接,均应在主体结构冲沙,油漆前.


Technical requirements:


1.Access is assembled according to the drawing;
2.All platforms are made of channel steel [140*50*5,flat bar -5*50 etc.;
3.The surface of platforms contacting grating should be flat,welds of the contacting surface should be grinded to be flat;
4.The unmarked Welds are all continuous, weld leg is 0.7 time the thickness of plate;
5.All brackets should be welded to the main structure of the crane before the main structure's sand blowing and painting.


NO.	SUB-NO. OR STDD	VER	NAME & SIZE	MTRL	QTY	EACH	TOTAL	NOTE
20			焊缝重 solder weight	按技术要求	1	31.9	31.9	钢材总重 ×2.5%
19	J526A500804	0	栏杆 Handrail Arrangement	组件Ass.	1	275.5	275.5	
18	J526A500803	0	格栅板 Grating arrangement	组件Ass.	1	455.1	455.1	
17	ZT2-033302-00	0	走道安全门(倾斜梯) Walkway Safety Door	组件Ass.	1	19.5	19.5	82L1
16			槽钢 100×50×5 l=1000 U-bar	Q235-A	1	7.5	7.5	"定制"
15			槽钢 100×50×5 l=986 U-bar	Q235-A	2	7.4	14.8	"定制"
14	GB9787-88		角钢 63×63×6 l=1830 L-bar	Q235-A	6	10.5	63.0	
13	GB9787-88		角钢 50×50×5 l=1000 L-bar	Q235-A	4	3.8	15.2	
12	GB707-88		槽钢 100×48×5.3 l=635 U-bar	Q235-A	2	6.4	12.8	"[10"
11	GB707-88		槽钢 100×48×5.3 l=550 U-bar	Q235-A	2	5.5	11.0	"[10"
10	GB9787-88		角钢 50×50×5 l=460 L-bar	Q235-A	1	1.7	1.7	
9	GB9787-88		角钢 50×50×5 l=830 L-bar	Q235-A	2	3.1	6.2	
8	GB9788-88		角钢 75×50×6 l=2777 L-bar	Q235-A	2	15.8	31.6	
7	GB707-88		槽钢 100×48×5.3 l=2927 U-bar	Q235-A	4	29.3	117.2	"[10"
6	GB707-88		槽钢 220×77×7.0 l=4849 U-bar	Q235-A	4	121.2	484.8	"[22a"
5	GB707-88		槽钢 220×77×7.0 l=466 U-bar	Q235-A	4	11.6	46.4	"[22a"
4	GB709-88		钢板 8 F=280×300 Armor plate	Q235-A	4	3.1	12.4	
3	GB709-88		钢板 8 F=150×130 Armor plate	Q235-A	2	0.9	1.8	
2	J526A500802	0	直梯1~3 Ladder	组件Ass.	1	485.1	485.1	
1	J526A500801	0	平台1~3 Platform	组件Ass.	1	952.7	952.7	

设计/DSGN		校对/CHKD		图幅/FORMAT A1
日期/DATE		日期/DATE		
材料/MAT	部件Ass.	比例/SCALE	图名/DRAWING NAME	后大梁尾部维修平台 platform and access at girder end
单重/WEI	3046.2	1:40		
审核/Chkd	ZPMC 上海振华港机公司		图号/DRAWING NO. J526A5008	版本/REV 0 / 页号/PAGE 1

010203

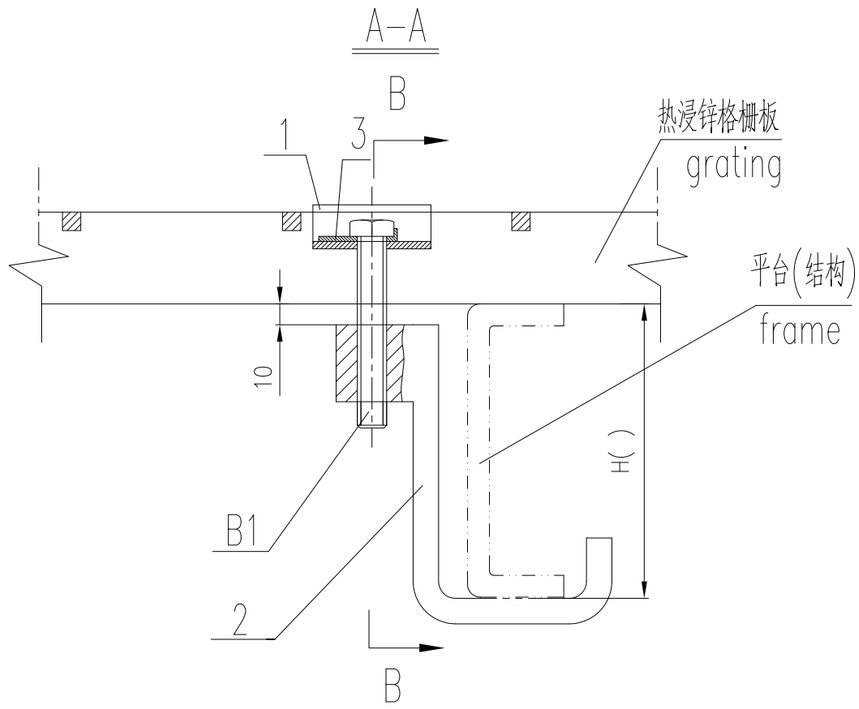

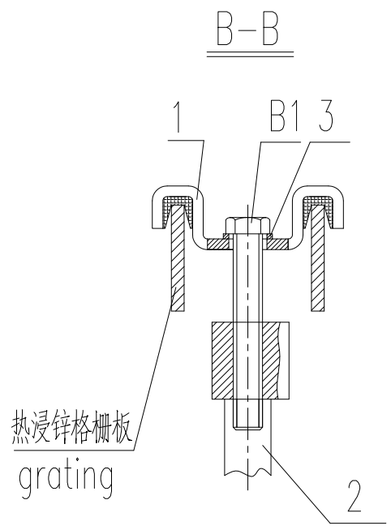

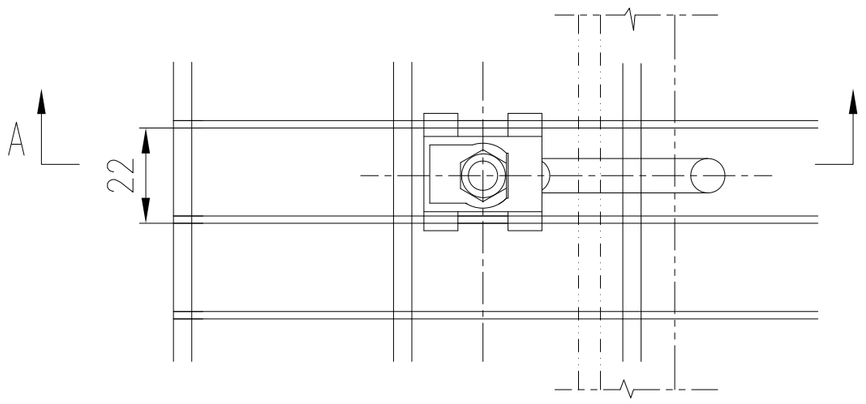

技术要求


1.把压板先嵌在格栅板的扁钢上,螺栓上涂防松胶,再拧紧螺栓.


REQUIREMENT

1.Put the saddle plate on the grating, glue the bolt, then tighten.

另件号	分图号或标准	名称及规格	材料或型号	每套数量	单重	共重	备注
B1	GB5783-86	六角螺栓 bolt M8*70	不锈钢 stainless steel	1	0.05		不锈钢具体材料见三表
3	LERDP	两耳止动垫圈(22) locked washer	不锈钢 stainless steel	1	0.02		不锈钢具体材料见三表
2	GD0102E	固定钩 hook	Q235	1	0.16		热浸锌厚度88μm并油漆
1	GYB-22(Q)	嵌条压板 saddle plate	不锈钢 stainless steel	1	0.04		不锈钢具体材料见三表

描述及日期	设计/DSGN	校对/CHKD	图幅/FORMAT		
	日期/DATE	日期/DATE			
	材料/MAT	比例/SCALE	图名/DRAWING NAME		
	单重/WEI		固定钩装配 FIXING		
修改标志	ZPMC 上海振华港机公司		图号/DRAWING NO. GD01(22)a	版本/REV	页号/PAGE

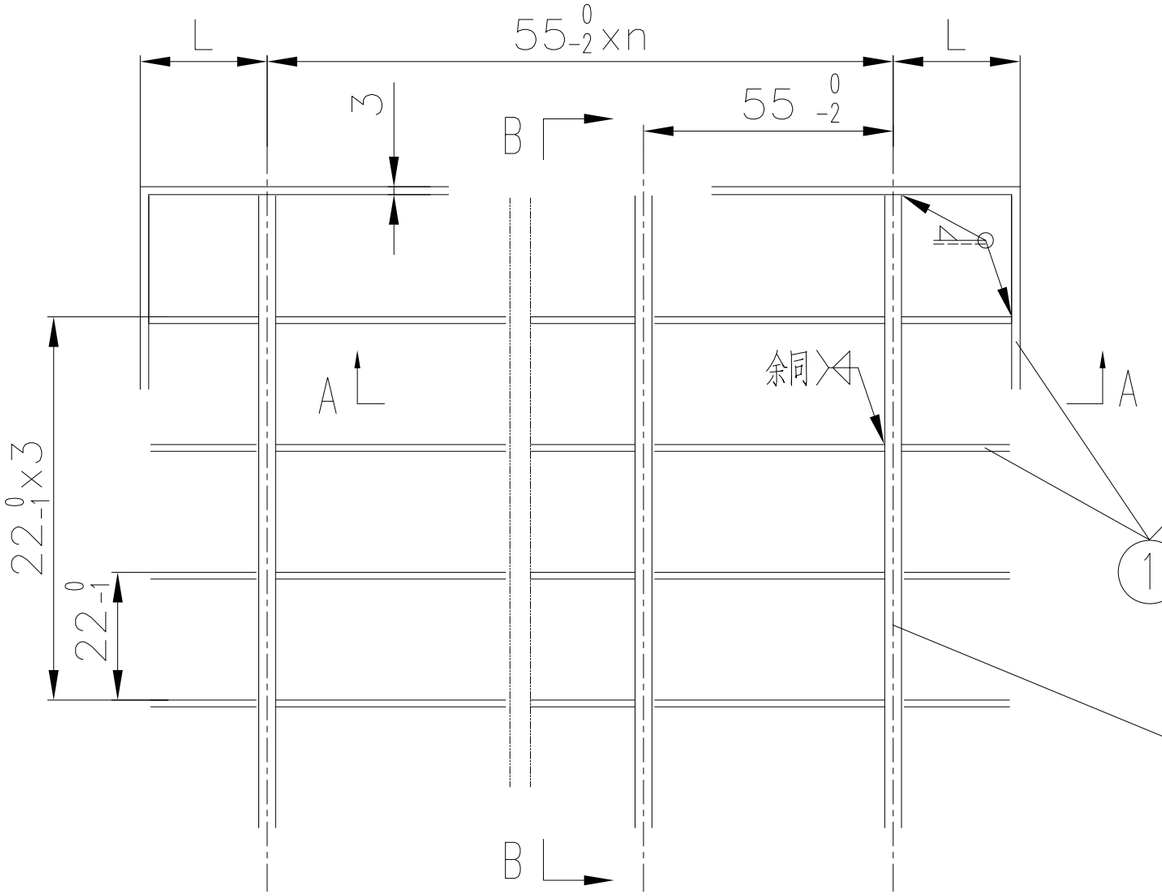


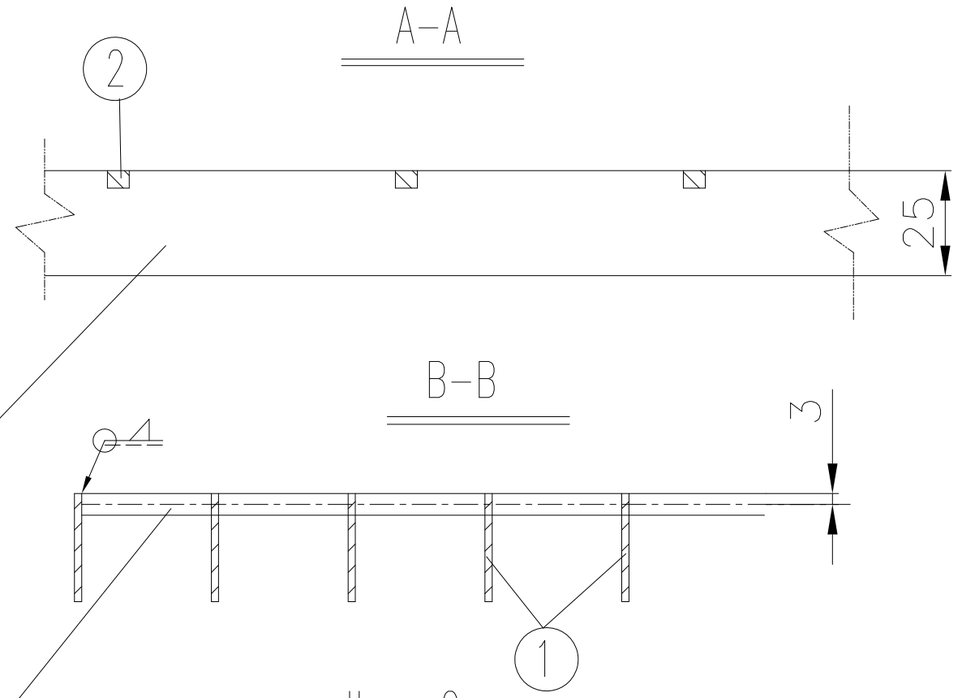

Item 2

(用5x5方钢螺旋而成)

(Made of square steel)

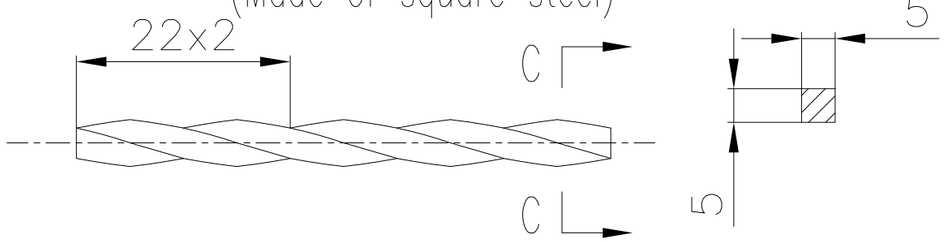

技术要求

1.施焊前须预处理(冲砂,校平,磨光,倒园);


2.件1,2间点焊,周边连续焊;

3.清除焊渣,打棱,磨光后热浸锌620g/m²(88μm).

4.每块格栅板的制作公差见右图.

格栅板制作公差示意图

Tolerance

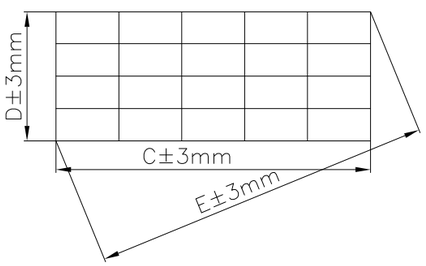

REQUIREMENT

1.The parts should be fore-processed (sand blasting, flattening, smoothing and rounding sharp edges);


2.Tack welding between item1 and item2, others are continuous welding;


3.Steel grating shall be Hot-dip galvanized after slag removal, rounding sharp edges and smoothing, the thickness of the zinc coating is 88μm.


4.The requirement of the tolerance is shown on the right drawing.


NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	each WEIGHT	total WEIGHT	NOTE
2		anti-slip steel bar □5*5	Q235				
1		-3*25	Q235				


设计/DSGN		校对/CHKD	图幅/FORMAT
日期/DATE		日期/DATE	
材料/MAT	比例/SCALE	图名/DRAWING NAME	
单重/WEI		格栅板 Steel Grating	
审核/APPD	ZPMC 上海振华港机公司	图号/DRAWING NO. GSB25-(22)	版本/REV 页号/PAGE

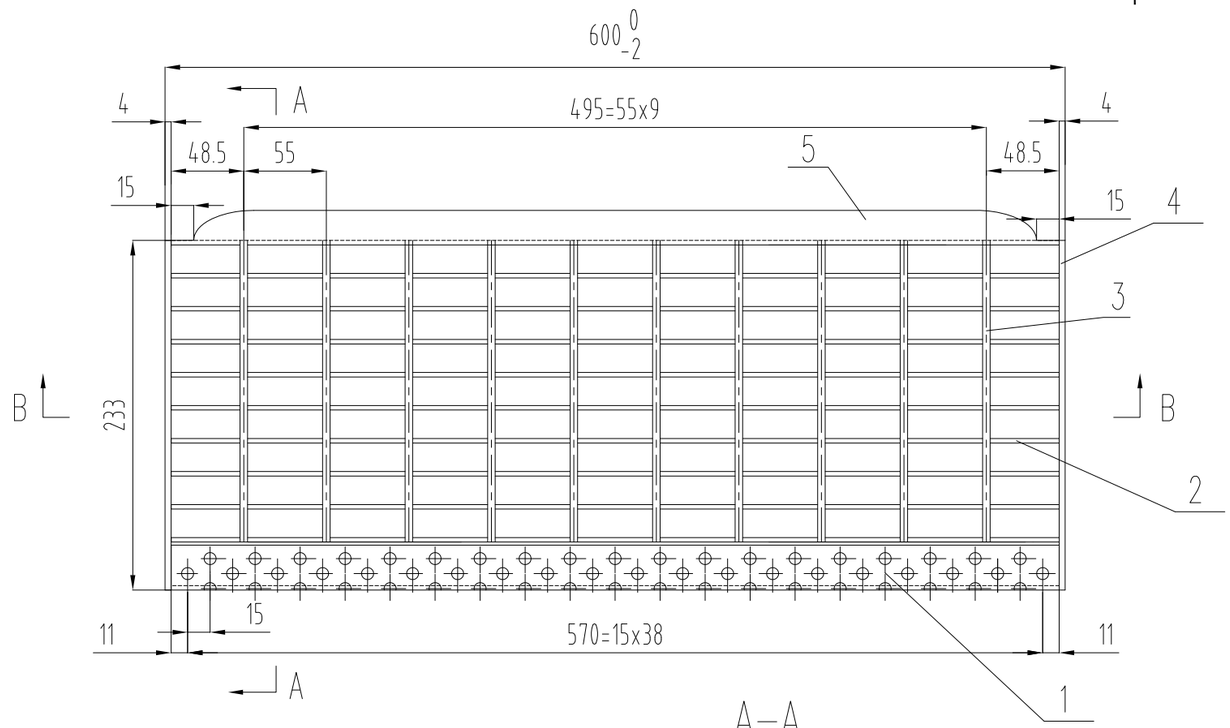

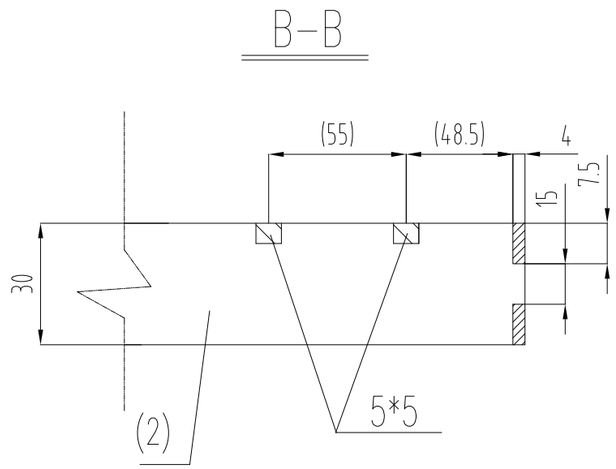


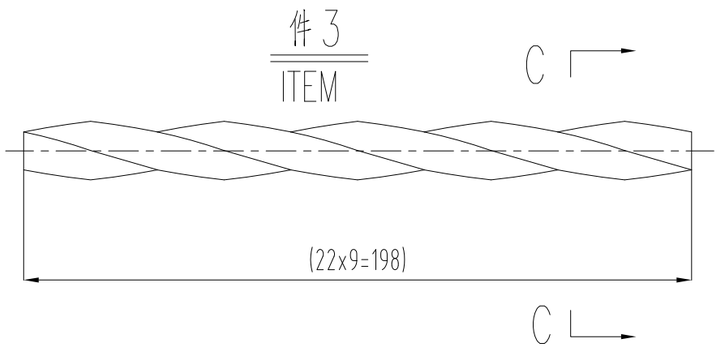


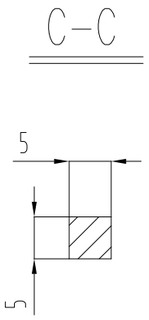

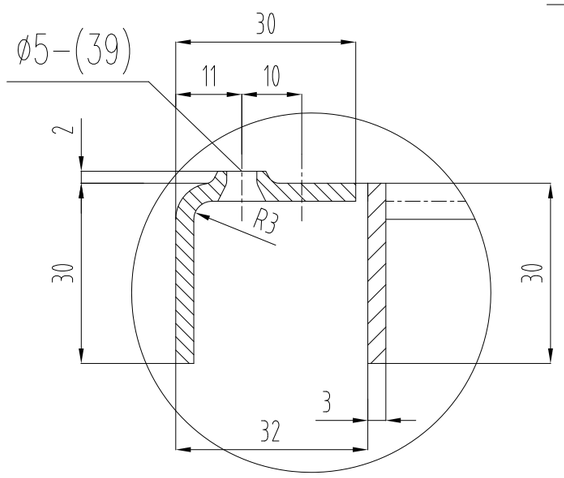

详图 a
DETAIL

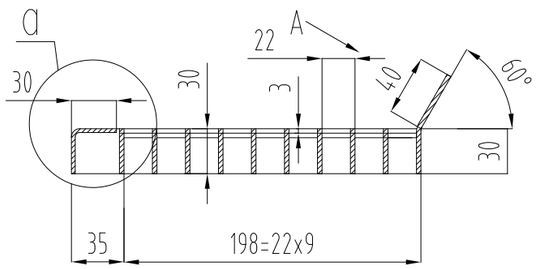

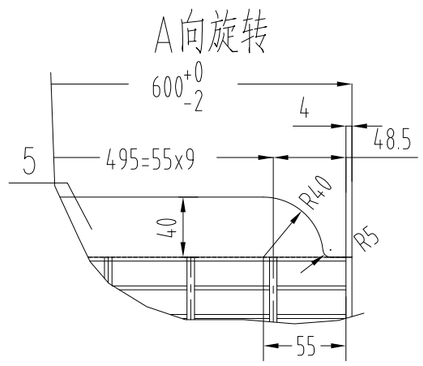

REQUIREMENT


1.The parts should be fore-processed (sand blasting, flattening, smoothing and rounding sharp edges);
2. All the weldings are continuous.
3.treads shall be welded to the side-rails after slag removal, rounding sharp edges and smoothing


技术要求

1.施焊前须预处理(冲砂,校平,磨光,倒园);
2.全部连续焊;
3.清除焊渣,打棱,磨光后与斜梯梯梁焊接.


NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	WEIGHT each	WEIGHT total	NOTE
5	Plate	后封板 -3x71x592	Q235	1		1	
4	Plate	侧板 -4x30x233	Q235	2	0.22	0.44	
3	Anti-slip bar	防滑钢条 -5x5x198	Q235	10	0.039	0.4	
2	Plate	横隔板 -3x30x600	Q235	9	0.42	3.78	
1	Plate	前封板 -3x56x592	Q235	1		0.78	

描述及日期 | 设计/DSGN | 校对/CHKD | 图幅/FORMAT
日期/DATE | 日期/DATE
材料/MAT | 比例/SCALE | 图名/DRAWING NAME: (斜梯)格栅踏步板 Tread
单重/WEI: 6.4kg
修改标志 | ZPMC 上海振华港机公司 | 图号/DRAWING NO.: T-600(H)-233b | 版本/REV | 页号/PAGE

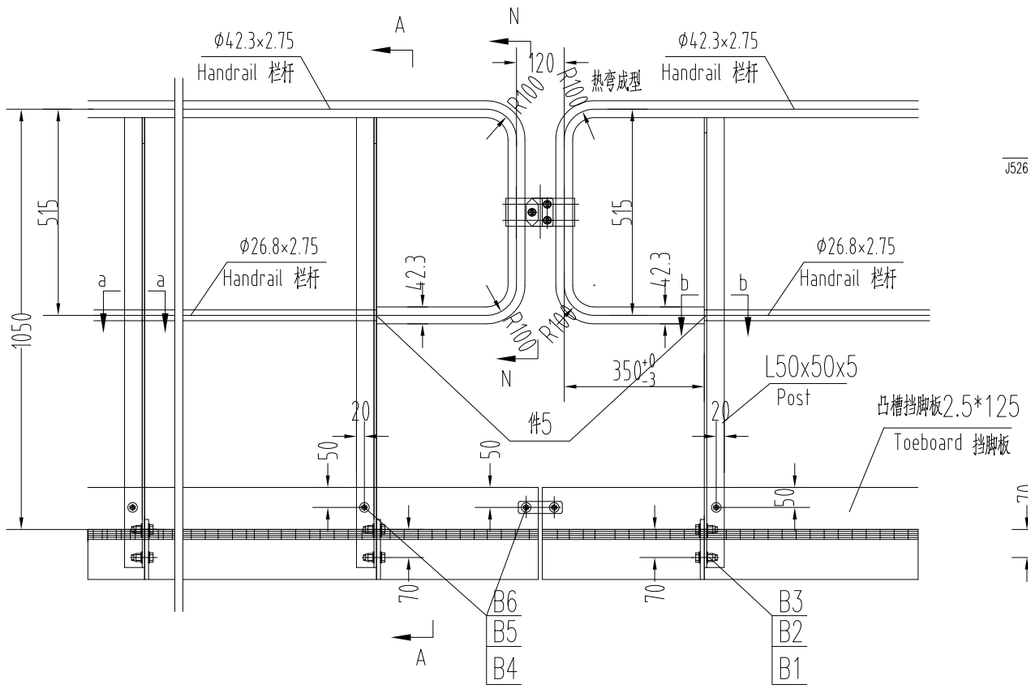


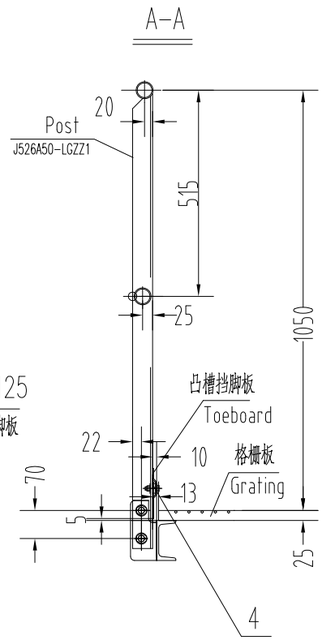


凸槽挡脚板截面图

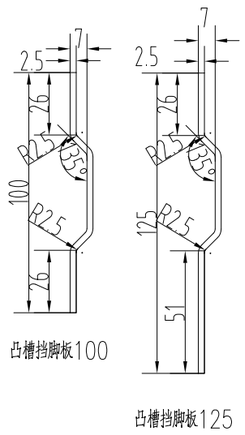


各型号槽钢与立柱连接详图

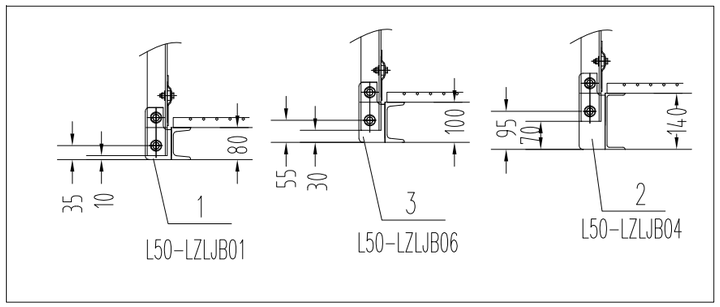


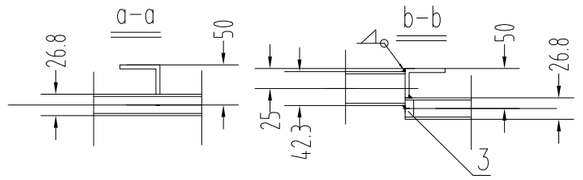


件5与Φ26.8*2.75连接

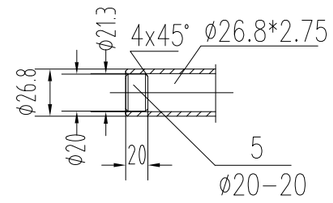


栏杆衬焊典型图 I
(用衬管以便锌液流出)

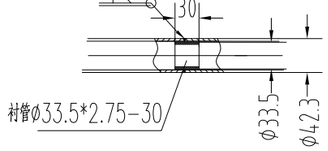

栏杆衬焊典型图2
(用衬管以便锌液流出)

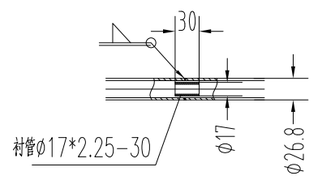

N-N

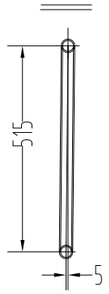

Note:


1. The handrails, Stanchions shall be hot dip galvanized together after welded and should be painted with painting for galvanized surface after installation. Toeboards shall be hot dip galvanized. The Grating is hot dip galvanized separately without painting. The zinc coat shall not less than 88μm.,
2. The clearance between handrails of two adjacent segments shall within 75~120mm.
3. The distance between two stantions shall not exceed 1.5m.
4. The hand rail shall be properly painted after galvanized.
5. The platform frame under the grating should be painted without galvaized.
6. The surface of the galvanized items which adjacent to Stainless washers should be painted.
7.After hot dip galvanized good, painting the contact faces of post and joint plate according to the paint craft, again uses the bold fastening;
8. After the bolt screws tight, spreads the paint according to the paint craft;

技术说明:

1.栏杆与支柱焊接,焊缝打磨, 并钻好漏锌孔(请特别注意漏锌孔开在管子下面,以防进水,除非为保证热浸锌质量,漏锌孔需要开在管子其他面处),制作好后分片去热浸锌,挡脚板单独热浸锌,热浸锌厚度88μm;支柱与挡脚板螺栓连接;
2.栏杆分断不连续;
3.相邻两栏杆立柱间距不超过1.5m;
4.栏杆按项目规定的工艺油漆;
5.平台框架不热浸锌,仅油漆;
6.热浸锌件的螺栓孔与不锈钢垫片的接触面,按油漆工艺涂油漆;
7.热浸锌好的立柱与连接板的接触面,按油漆工艺涂油漆,再用螺栓连接;
8.螺栓拧紧好后,按油漆工艺涂油漆.

NO.	SUB-NO. OR STDD	VER	NAME & SIZE	MTRL	QTY	EACH(Kg)	TOTAL(Kg)	NOTE
B6	GB5783-86		螺栓 M8×30 Bolt	不锈钢				
B5	GB889-86		锁紧螺母 M8 Lock nut	不锈钢				
B4	GB/T96.2-2002		大垫圈 8 Washer	不锈钢				
B3	GB5783-86		螺栓 M14×40 Bolt	8.8				'Dacro '
B2	ZN6175-T-SL		施必牢螺母 M14 Nut	08H				'Dacro '
B1	GB95-85		垫圈 14 Washer	100HV				'Dacro '
5			Φ20-20	Q235				
4			-6.5×Φ20×Φ10	Q235				
3	L50-LZLJB06	0	L50角钢立柱连板06 Plate	Q235				
2	L50-LZLJB04	0	L50角钢立柱连板04 Plate	Q235				
1	L50-LZLJB01	0	L50角钢立柱连板01 Plate	Q235				

描述及日期	设计/DSGN		校对/CHKD		图幅/FORMAT	A3
	日期/DATE		日期/DATE			
	材料/MAT Q235	比例/SCALE	图名/DRAWING NAME 栏杆安装示意图1 Railing Assembly			
	单重/WEI					
修改标志	ZPMC 上海振华港机公司		图号/DRAWING NO. J526A50-LG1		版本/REV	页号/PAGE 1

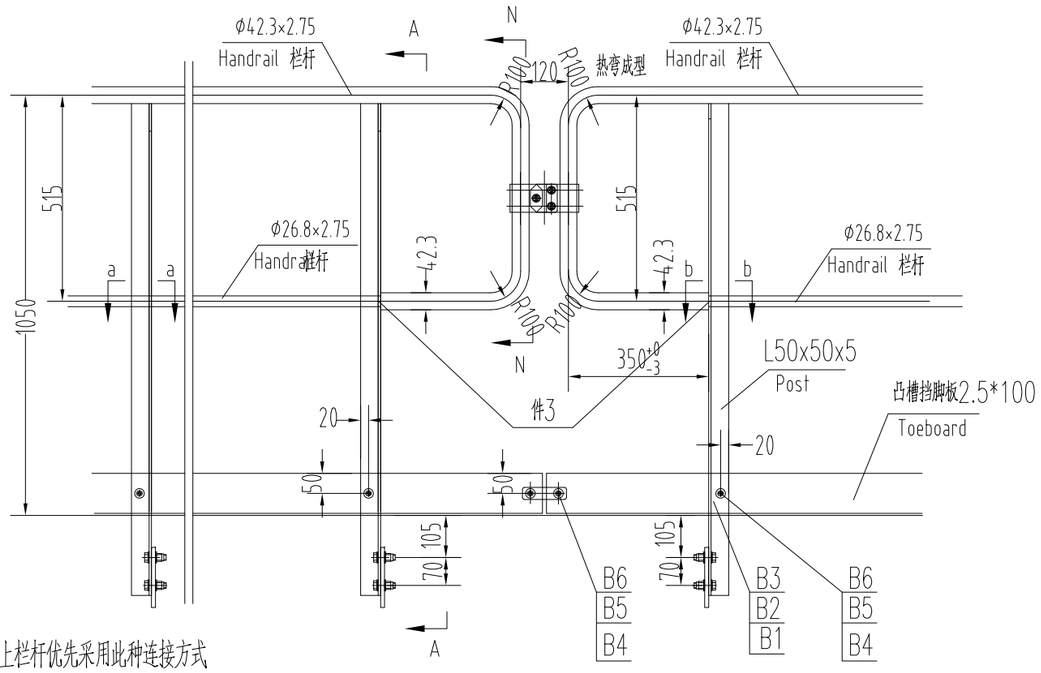


结构件上栏杆优先采用此种连接方式


On the structural element the handrail first selects this connection method


Note:


1. The handrails, Stanchions shall be hot dip galvanized together after welded and should be painted with painting for galvanized surface after installation. Toeboards shall be hot dip galvanized. The Grating is hot dip galvanized separately without painting. The zinc coat shall not less than 88μm.,
2. The clearance between handrails of two adjacent segments shall within 75~120mm.
3. The distance between two stantions shall not exceed 1.5m.
4. The hand rail shall be properly painted after galvanized.
5. The surface of the galvanized items which adjacent to Stainless washers should be painted.
6.After hot dip galvanized good, painting the contact faces of post and joint plate according to the paint craft, again uses the bold fastening;
7. After the bolt screws tight, spreads the paint according to the paint craft;

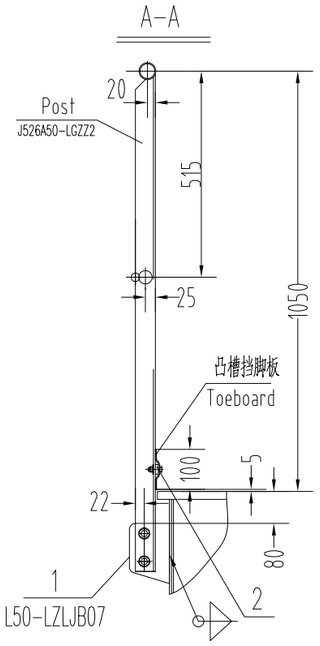


凸槽挡脚板截面图

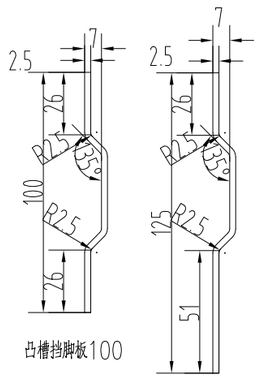

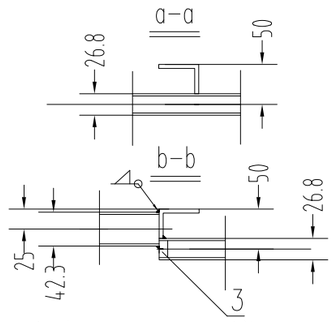

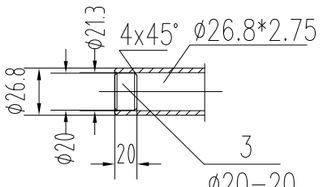

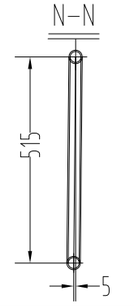

技术说明:

1.栏杆与支柱焊接,焊缝打磨, 并钻好漏锌孔(请特别注意漏锌孔开在管子下面,以防进水,除非为保证热浸锌质量,漏锌孔需要开在管子其他面处),制作好后分片去热浸锌,挡脚板单独热浸锌,热浸锌厚度88μm;支柱与挡脚板螺栓连接;

2.栏杆分断不连续;

3.相邻两栏杆立柱间距不超过1.5m;

4.栏杆按项目规定的工艺油漆;


5.热浸锌件的螺栓孔与不锈钢垫片的接触面,按油漆工艺涂油漆;

6.热浸锌好的立柱与连接板的接触面,按油漆工艺涂油漆,再用螺栓连接;

7.螺栓拧紧好后,按油漆工艺涂油漆.


栏杆衬焊典型图 1

(用衬管以便锌液流出)

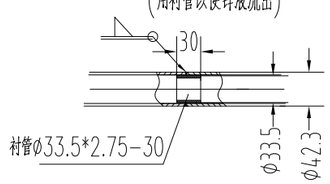


栏杆衬焊典型图2


(用衬管以便锌液流出)

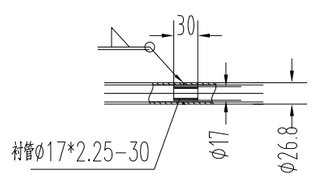


NO.	SUB-NO. OR STDD	VER	NAME & SIZE	MTRL	QTY	EACH(Kg)	TOTAL(Kg)	NOTE
B6	GB5783-86		螺栓 M8×30 Bolt	不锈钢				
B5	GB889-86		锁紧螺母 M8 Lock nut	不锈钢				
B4	GB/T96.2-2002		大垫圈 8 Washer	不锈钢				
B3	GB5783-86		螺栓 M14×40 Bolt	8.8				'Dacro '
B2	ZN6175-T-SL		施必牢螺母 M14 Nut	08H				'Dacro '
B1	GB95-85		垫圈 14 Washer	100HV				'Dacro '
3			Φ20-20	Q235				
2			-6.5×Φ20×Φ10	Q235				
1	L50-LZLJB07	0	L50角钢立柱连板07 Plate	Q235				


描述及日期	设计/DSGN	校对/CHKD	图幅/FORMAT A3
	日期/DATE	日期/DATE	
	材料/MAT	比例/SCALE	图名/DRAWING NAME 栏杆安装示意图2 Railing Assembly
	单重/WEI		
修改标志	ZPMC 上海振华港机公司	图号/DRAWING NO. J526A50-LG2	版本/REV
			页号/PAGE 1

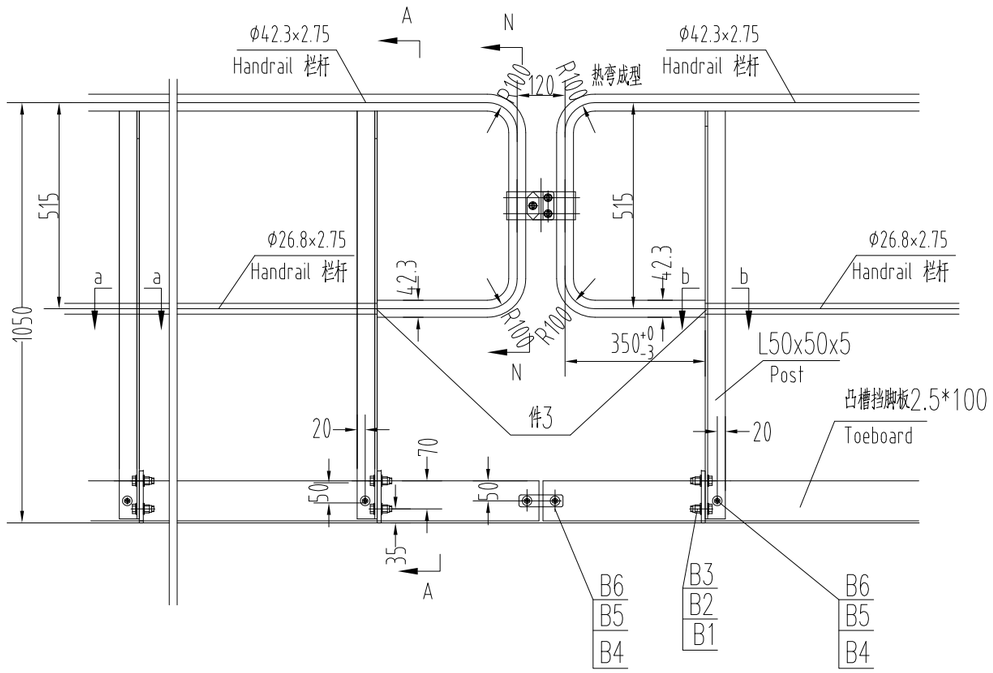


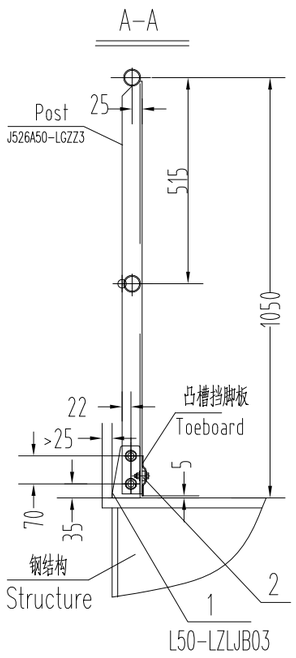


凸槽挡脚板截面图

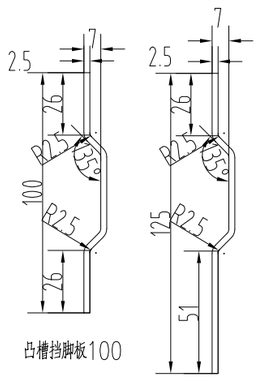

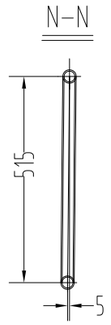

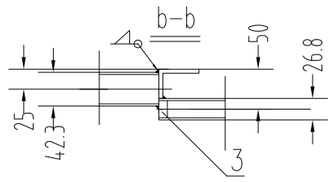

件3与Φ26.8*2.75连接

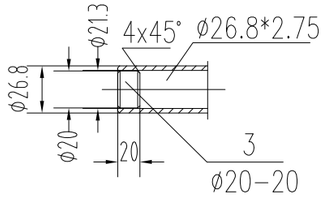

技术说明:

1.栏杆与支柱焊接,焊缝打磨, 并钻好漏锌孔(请特别注意漏锌孔开在管子下面,以防进水,除非为保证热浸锌质量,漏锌孔需要开在管子其他面处),制作好后分片去热浸锌,挡脚板单独热浸锌,热浸锌厚度88μm;支柱与挡脚板螺栓连接;

2.栏杆分断不连续;

3.相邻两栏杆立柱间距不超过1.5m;

4.栏杆按项目规定的工艺油漆;


5.热浸锌件的螺栓孔与不锈钢垫片的接触面,按油漆工艺涂油漆;

6.热浸锌好的立柱与连接板的接触面,按油漆工艺涂油漆,再用螺栓连接;


7.螺栓拧紧好后,按油漆工艺涂油漆.

Note:


1. The handrails, Stanchions shall be hot dip galvanized together after welded and should be painted with painting for galvanized surface after installation. Toeboards shall be hot dip galvanized. The Grating is hot dip galvanized separately without painting. The zinc coat shall not less than 88μm.,
2. The clearance between handrails of two adjacent segments shall within 75~120mm.
3. The distance between two stantions shall not exceed 1.5m.
4. The hand rail shall be properly painted after galvanized.
5. The surface of the galvanized items which adjacent to Stainless washers should be painted.
6.After hot dip galvanized good, painting the contact faces of post and joint plate according to the paint craft, again uses the bold fastening;
7. After the bolt screws tight, spreads the paint according to the paint craft;



栏杆衬焊典型图 1
(用衬管以便锌液流出)

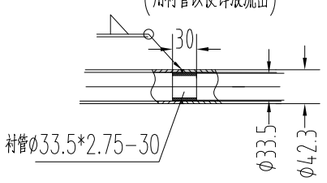

栏杆衬焊典型图2
(用衬管以便锌液流出)

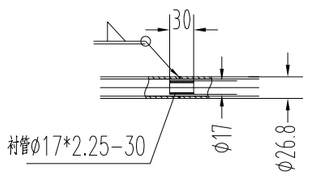


B6	GB5783-86		螺栓 M8×30 Bolt	不锈钢				
B5	GB889-86		锁紧螺母 M8 Lock nut	不锈钢				
B4	GB/T96.2-2002		大垫圈 8 Washer	不锈钢				
B3	GB5783-86		螺栓 M14×40 Bolt	8.8				'Dacro '
B2	ZN6175-T-SL		施必牢螺母 M14 Nut	08H				'Dacro '
B1	GB95-85		垫圈 14 Washer	100HV				'Dacro '
3			Φ20-20	Q235				
2			-6.5×Φ20×Φ10	Q235				
1	L50-LZLJB03	0	L50角钢立柱连板03 Plate	Q235				
NO.	SUB-NO. OR STDD	VER	NAME & SIZE	MTRL	QTY	EACH(Kg)	TOTAL(Kg)	NOTE

描述及日期	设计/DSGN	校对/CHKD	图幅/FORMAT A3
	日期/DATE	日期/DATE	
	材料/MAT	比例/SCALE	图名/DRAWING NAME 栏杆安装示意图3 Railing Assembly
	单重/WEI		
修改标志	ZPMC 上海振华港机公司	图号/DRAWING NO. J526A50-LG3	版本/REV
			页号/PAGE 1

No	图 号(Drawing No.)	名 称(Name)	斜度(Degree)	H=R×N	A	B	C	D	mxn	e	件数(QTY)	备注
	XTB-2730	斜梯Stair	50°									

REV	DATE	BY	DESCRIPTION

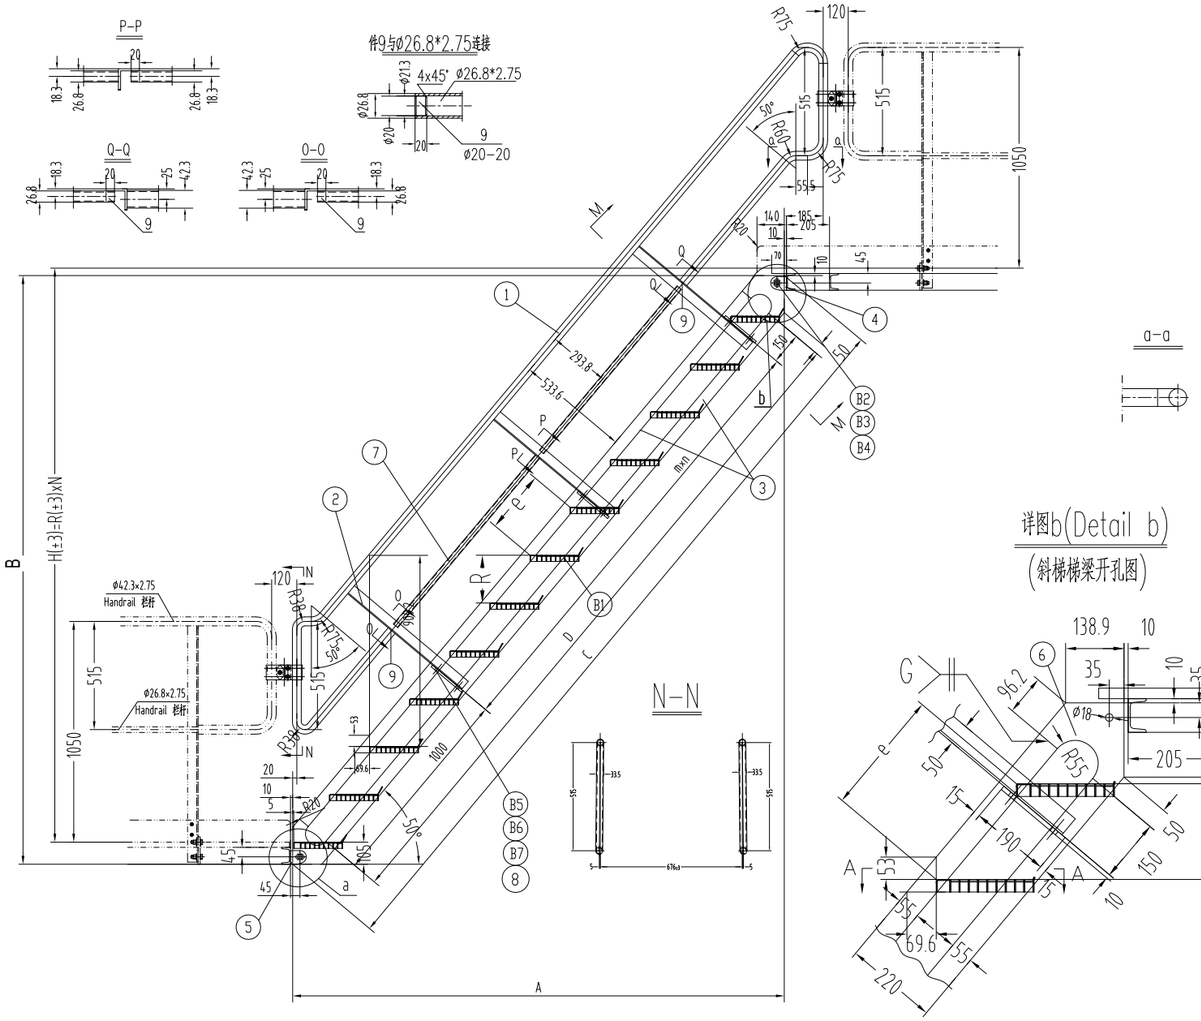

注:明细表内为本图栏杆,斜梯之材料汇总.
Note: The material in the subsidiary list belongs to the stairs of this drawing.

NO.	SUB-NO.	NAME & SIZE	MTRL or STYLE	QTY/set	each WEIGHT	total WEIGHT	NOTE
B7	GB5783-86	六角螺栓 M14x45 Bolt	8.8级 Grade 8.8	12			达克罗 Dacrotized
B6	ZN6175-T-SL	施必牢螺母 M14 nut	8级 Grade 8	12			达克罗 Dacrotized
B5	GB95-85	垫圈 14 Washer	100HV	24			达克罗 Dacrotized
B4	GB5783-86	六角螺栓 M16*50 bolt	8.8级 Grade 8.8	4			达克罗 Dacrotized
B3	ZN6175-T-SL	施必牢螺母 M16 nut	8级 Grade 8	4			达克罗 Dacrotized
B2	GB95-85	平垫 ø16 washer	100HV	8			达克罗 Dacrotized
B1	T-600(H)-233b	(斜梯)格栅踏步 Tread	组件 Unit	12	6.5		
9		ø20-20	Q235				
8	L50-XTLZLB	L50角钢 斜梯立柱连板	Q235	6	1		
7		ø26.8*2.75 L=3.66m	Q235	2	1.63		
6	XTTB(50)	斜梯头板(50)	Q235	4	1.48		
5	XTXLB(16)	斜梯下连板 Plate	Q235	2			
4	XTSLB(16)	斜梯上连板 Plate	Q235	2			
3		-8x55 L=3.28m	Q235	4	3.45		
2	J526A50-XTZZ	斜梯支柱 Post (L50x50x5)	Q235	6	2.8		
1		ø42.3*2.75 L=3.59m	Q235	2	2.09		

PROJECT: | DESIGN STAGE: | SCALE:

ITEM NAME: 斜梯 Stairs | DRAW NO: J526A50-XT | PROJ.

ZPMC

DSGN			TRACE			APP.	
DRAW			CHCK			Q'TY/SET	
CHCK			VER.			SET/CRANE	195kg

技术要求

1.件1,件2,件7和件9焊接在一起,焊缝打磨,制作好后分片去热浸锌;
2.件3,件6,件8和B1焊接在一起,焊缝打磨,制作好后分片去热浸锌;
3.栏杆与梯梁间用螺栓连接;
4.斜梯通过件4,5与平台用螺栓连接;
5.热浸锌厚度不小于88um;
6.在管子上钻漏锌孔(请特别注意漏锌孔最好开在管子下面,以防进水,如为保证热浸锌质量,漏锌孔需要开在管子其他面处,则必须在可能积水的地方,开漏水孔);
7.d,e处的栏杆用标准弯头制成标准段;
8. 施必牢螺母安装扭矩:M20--440Nm;
9.热浸锌件的螺栓孔与不锈钢垫片的接触面,按油漆工艺涂油漆;
10.热浸锌好后件4与件6,件5与件6的接触面,按油漆工艺涂油漆,再用螺栓连接;
11.螺栓拧紧好后,按油漆工艺涂油漆;
12.两踏步间高度制作公差要求≤±3mm,最终验收按±5mm.

制造运输安装过程请注意:
1.热浸锌前焊渣一定要清除干净;
2.热浸锌时要保证两侧梯梁同时浸锌受热,以防斜梯扭转变形;
3.运输安装过程中要防止碰撞,扭转,破坏锌层.

Technical Condition

1.The item 1, item 2, item 7and item 9 shall be hot dip galvanized together after welded.
2. The item 3, item 6, item 8 and B1 shall be hot dip galvanized together after welded.
3.the handrail shall be joined with the side-rail by bolts.
4.the whole stairs shall be joined with platform by item 4 and item 5.
5.The zinc coat shall be not less than 88um.
6.The Venting and draining holes for hot dip galvanizing shall be made before galvanized. All the holes shall be located on the undersurface of the raillings if it is not adverse to the quality of galvanizing and at least one hole shall be located at the lowest point of railings. All the welding shall be cleaned before galvanized.
7.The handrail of the d and e shall be made into standard segment by the standard bend pipe.
8.The fastening moment of NUT: M20-440N.m
9.the surface of the galvanized items which adjacent to Stainless washers should be painted according to the paint craft
10.After hot dip galvanized item 5 and item 6 contact surfaces, item 4 and item 6 contact surfaces spread the paint according to the paint craft, then use the bold fastening;
11. After the bolt screws tight, spreads the paint according to the paint craft;
12.The tolerance between two steps are ≤±3mm for fabrication measurements and ±5mm for final inspection.

Note:
1.Clear all the welding slag before galvanization.
2.To prevent deformation in twist, make sure both end of the side-rail to be put into the hot Zinc pool simultaneous .
3.Measures shall be taken to prevent galvanized surface from damage during the transportation.


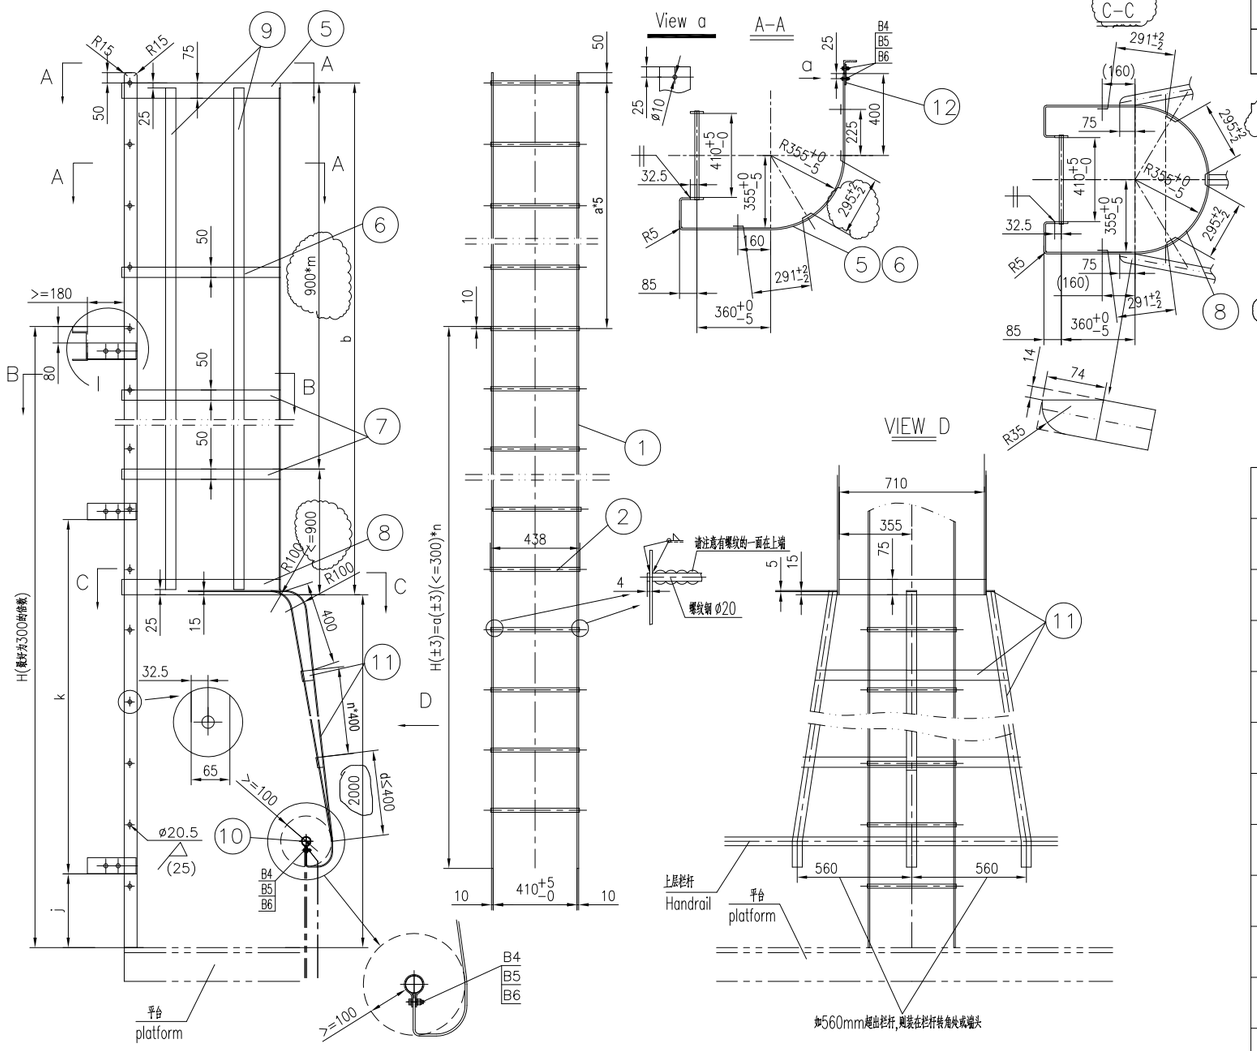


图　号	名称	H=a*n	b	m	数量	j	k	备　注
	直梯				1			

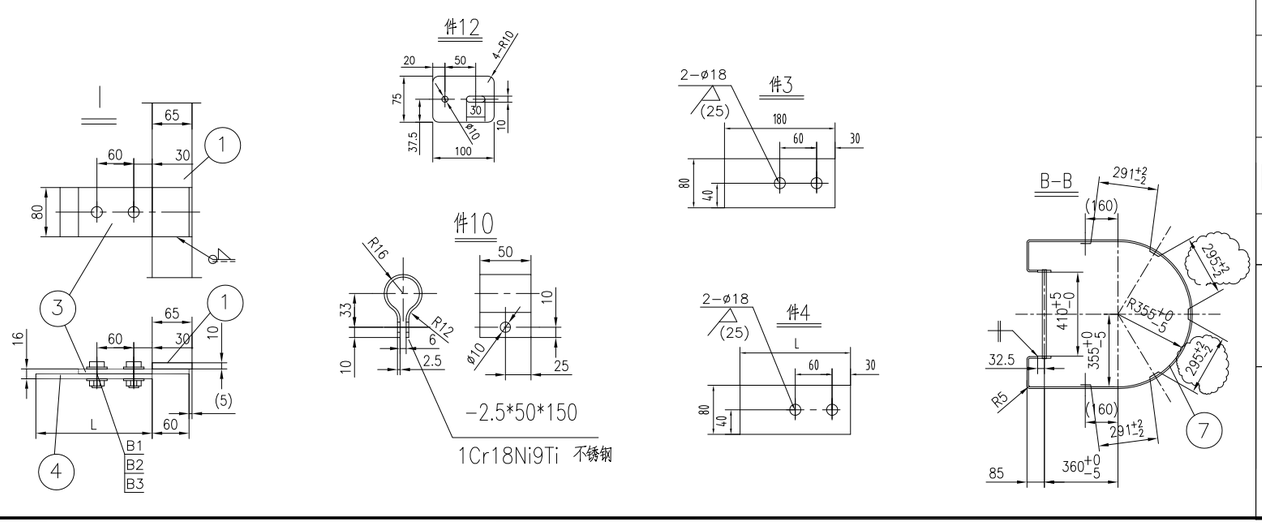

REV	DATE	BY	DESCRIPTION

技术要求
1.梯梁成对钻孔,打磨光洁,装螺纹钢踏步,护圈后,按工艺油漆;
2.全部连续焊;
3.制做好后,螺纹钢按油漆工艺涂防滑漆;
4.直梯按图与平台或结构联接;
5.施必牢螺母安装扭矩:M16--200Nm;
6.两踏杆间高度不得大于300mm制作公差要求≤±3mm,最终验收按±5mm;
7.热浸锌件的螺栓孔与不锈钢垫片的接触面,按油漆工艺涂油漆;
8.螺栓拧紧好后,按油漆工艺涂油漆;
注:明细表内为制作本图所有直梯用料汇总

Note:
1. The rung holes shall be drilled in pairs. The ladder together with cage shall be painted.
2. All the weldings are continuous.
3.The surface of the rung shall be painted with antiskid painting.
4. The ladder is connected with structures or platforms according to the drawing.
5.The torque of the SPL nut 16--200Nm.
6.The rise is less than 300mm,The required tolerance of the rise is <=±3mm, and it is accepted if the tolerance is <=±5mm after finished.
7. The surface of the galvanized items which adjacent to Stainless washers should be painted.
8.Tighten the bolts and painted.
Note: The material in the subsidiary list belongs to the ladders of this drawing.

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	each WEIGHT	total WEIGHT	NOTE
B6	GB5783-86	Bolt 六角螺栓 M8x30	A2-70	4			Stainless
B5	GB889-86	Nut 防松螺母 M8	A2-70	4			Stainless
B4	GB95-85	Washer 垫圈 8	A2-70	8			Stainless
B3	GB5783-86	Bolt 六角螺栓 M16*45	8.8级 Grade	8			达克罗 Dacrotized
B2	ZN6175-T-SL	Nut 施必牢螺母 M16	8级 Grade	8			达克罗 Dacrotized
B1	GB95-85	Washer 平垫 16	100HV	16			达克罗 Dacrotized
12		-6*75*100	Q235		0.4		热浸锌 Hot-Gal.
11		-5*50 l=8m	Q235	1		16	
10		-2.5*50*195	1Cr18Ni9Ti 不锈钢	3	0.2	0.6	
9		-5*50*(b-50)	Q235	5			
8		-8*75*2390	Q235	1	7.5	7.5	
7		-8*50*2390	Q235		7.5		
6		-8*50*1595	Q235	1	5	5	
5		-8*75*1595	Q235	1	4.7	4.7	
4		-8*80-L(L长度现场定)	Q235	4	1		
3		-8*80*180	Q235	4	0.9	3.6	
2		rebar ø20*438 螺纹钢 ø20*438	Q235		1.1		
1		-10x65∑l=m	Q235	1	5.1		

PROJECT:　　DESIGN STAGE:　　SCALE:

ITEM NAME: LADDER 直梯

DRAW NO: J526A50-ZT1

ZPMC

DSGN		TRACE		APP.	
DRAW		CHCK		Q'TY/SET	pairs
CHCK		VER.		SET/CRANE	Kg

REV	DATE	BY	DESCRIPTION

技术要求
1.梯梁成对钻孔,打磨光洁,装螺纹钢踏步,护圈后,按工艺油漆;
2.全部连续焊;
3.制做好后,螺纹钢按油漆工艺涂防滑漆;
4.直梯按图与平台或结构联接;
5.施必牢螺母安装扭矩:M16--200Nm;
6.两踏杆间高度不得大于300mm制作公差要求≤±3mm,最终验收按±5mm;
7.热浸锌件的螺栓孔与不锈钢垫片的接触面,按油漆工艺涂油漆;
8.螺栓拧紧好后,按油漆工艺涂油漆
注:明细表内为制作本图所有直梯用料汇总

Note:
1. The rung holes shall be drilled in pairs. The ladder together with cage shall be painted.
2. All the weldings are continuous.
3.The surface of the rung shall be painted with antiskid painting.
4. The ladder is connected with structures or platforms according to the drawing.
5.The torque of the SPL nut 16--200Nm.
6.The rise is less than 300mm,The required tolerance of the rise is <=±3mm, and it is accepted if the tolerance is <=±5mm after finished.
7. The surface of the galvanized items which adjacent to Stainless washers should be painted.
8.Tighten the bolts and painted.
Note: The material in the subsidiary list belongs to the ladders of this drawing.

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	each WEIGHT	total WEIGHT	NOTE
B6	GB5783-86	Bolt 六角螺栓 M8x30	A2-70	4			Stainless
B5	GB889-86	Nut 防松螺母 M8	A2-70	4			Stainless
B4	GB95-85	Washer 垫圈 8	A2-70	8			Stainless
B3	GB5783-86	Bolt 六角螺栓 M16*45	8.8级 Grade	8			达克罗 Dacrotized
B2	ZN6175-T-SL	Nut 施必牢螺母 M16 nut	8级 Grade	8			达克罗 Dacrotized
B1	GB95-85	Washer 平垫 16	100HV	16			达克罗 Dacrotized
14		-5*50-L(L长度现场定)		2	0.2		
13		-5*50 l=8m	Q235	1		16	
12		-10*65*235		1	1.2		对称各一半
11		-2.5*50*195	1Cr18Ni9Ti 不锈钢	3	0.2	0.6	
10		-5*50*(b-50)	Q235	5			
9		-8*75*2390	Q235	1	12.3	12.3	
8		-8*50*2390	Q235		7.5		
7		-8*50*2330	Q235	1	7.3	7.3	
6		-8*75*2330	Q235	1	11	11	
5		-8*80-L(L长度现场定)	Q235	4	1		
4		-8*80*180	Q235	4	0.9	3.6	
3		pipe ø33.5x2.75-2795 圆管 ø33.5x2.75-2795	Q235	2	6.8	13.6	
2		rebar ø20*438 螺纹钢 ø20*438	Q235		1.1		
1		-10x65 Σl=m	Q235	1	5.1		

图 号	名称	H=a*n	b	m	数量	j	k	备 注
	直梯				1			

PROJECT:
DESIGN STAGE:
SCALE:
ITEM NAME: LADDER 直梯
DRAW NO: J526A50-ZT2

ZPMC						
	DSGN		TRACE		APP.	
	DRAW		CHCK		Q'TY/SET	
	CHCK		VER.		SET/CRANE	