


Machinery house arrangement
机器房布置 1:150

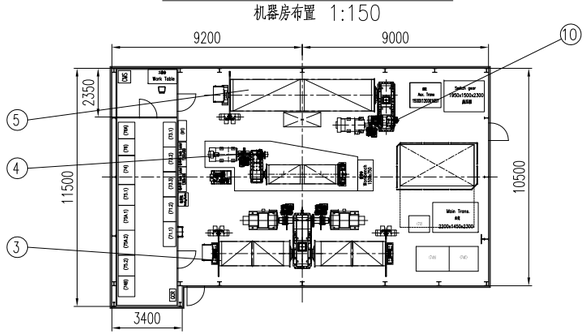


Main hoist rope reeving
起升缠绕系统

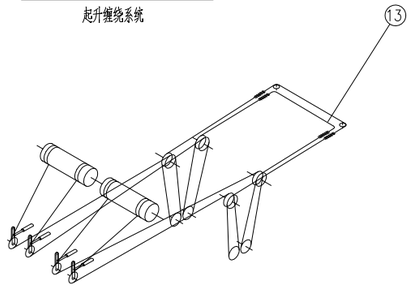


Trolley rope reeving
小车缠绕系统



Catenary trolley rope reeving
托架小车缠绕系统

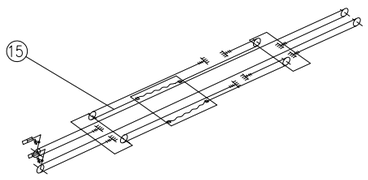


Boom hoist rope reeving
俯仰缠绕系统




吊钩横梁 Cargo beam
1:100





试重箱 Test load
1:150





吊具拖车Speader trailer
1:100



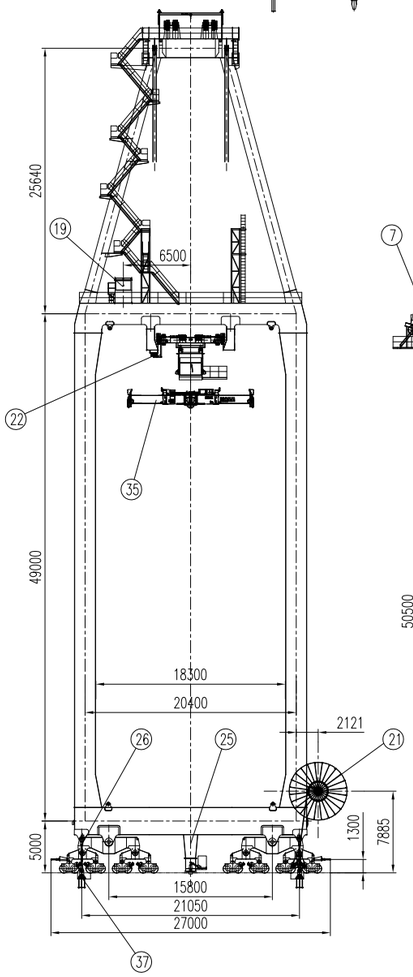

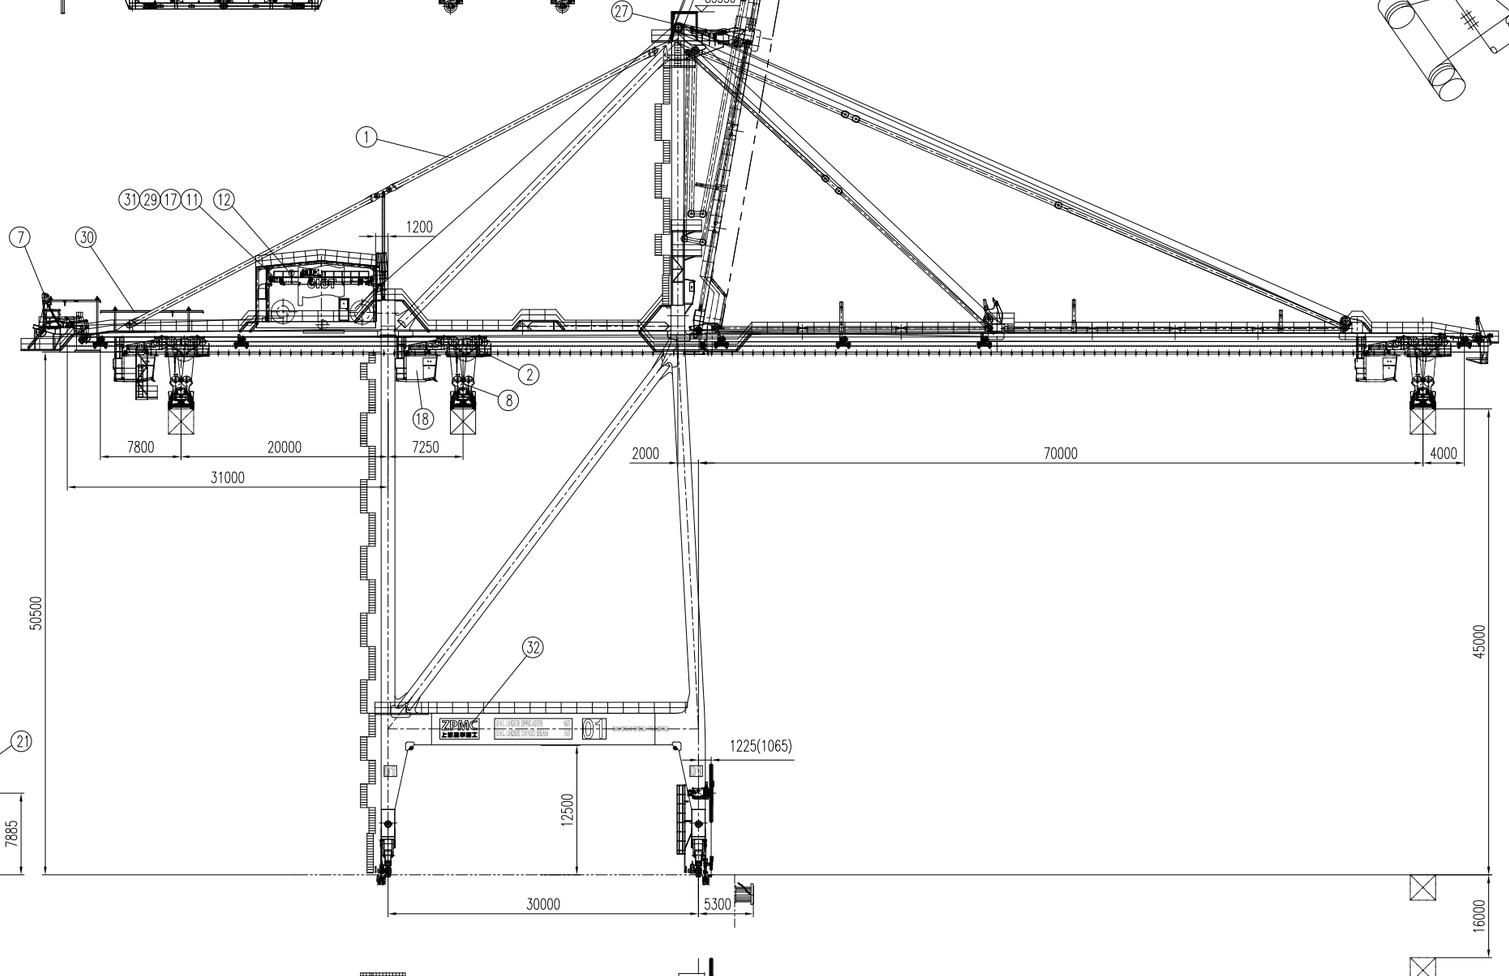

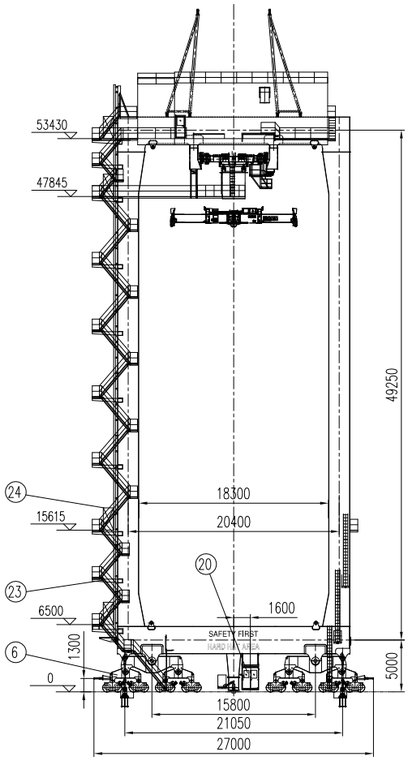

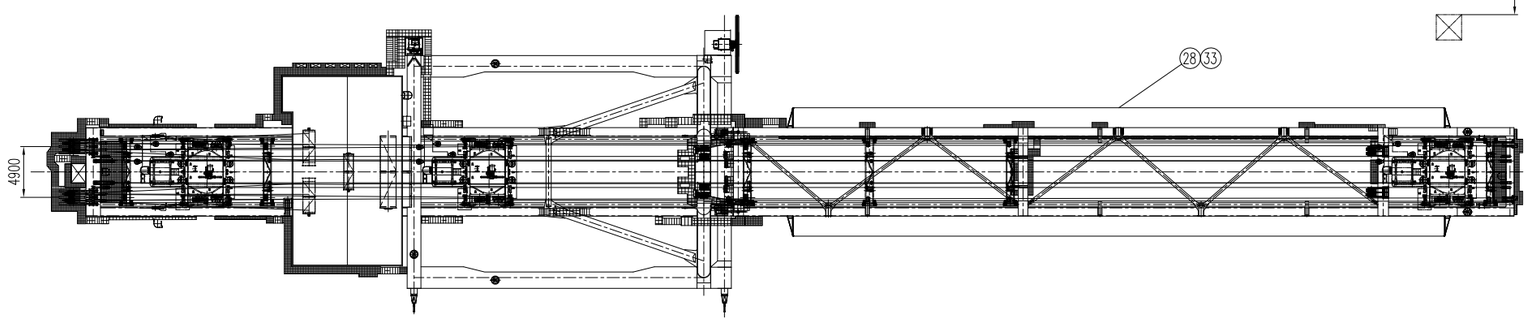

Particulars 主要参数

额定起重量 SWL	Under spreader 吊具下		65t
	Under Cargo Beam 吊钩横梁下		75t
Speed 速度	Main Hoist 主起升	65T under Spreader	75m/min
		50T under Spreader	90m/min
		Empty Spreader 空载	180m/min
	Trolley 小车		244m/min
	Gantry 大车		46m/min
	俯仰时间Boom Hoisting Time	0°–80°	< 5 min
Motors 电机	Main Hoist 主起升		2x450kW,750/900/1800rpm
	Trolley 小车		1x275kW, 1750rpm
	Gantry 大车		16x20kW, 1750rpm
	Boom Hoist 俯仰		1x375kW, 1750rpm
Rail Gauge 轨距			30m
Out reach 前伸距			70m
Back reach 后伸距			20m
Height of lift 起升高度	Above rail 轨上高度		45m
	Total 总高度		63m
Rail type 轨道型号			QU120
Gantry travel distance 大车行走距离			±400m
Power 电源			11KV+/−10%, 3PH, 50Hz+/−2%

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	each	total WEIGHT	NOTE

PROJECT: Sri Lanka CICT 12 STS Cranes　　DESIGN STAGE:　　SCALE: 1:300

ITEM NAME: 岸边集装箱起重机总布置图
Crane General Arrangement

DRAW NO: J526A00

ZPMC								
	DSGN			TRACE			APP.	
	DRAW			CHCK			Q'TY/SET	12
	CHCK			VER.			TOTAL WEIGHT	

明 细 表
SUBSIDIARY LIST

*The quantity and weight of this list is to one set
*此表为一套的数量和重量

____set套/crane台,____/set套,　　/crane台

设计(des)：

校对(chk)：

PROJECT NAME or CODE: Sri Lanka CICT 12 STS Cranes			SUB-PART NAME: 起重机总图 Crane general arrangement			SUB DRAW NO: J526A00	
序号 NO.	图号或标准 SUB-NO. or STDD	名称、规格或型号 NAME/SIZE/STYLE	材料 MTRL	数量 Q'TY	单重 EACH WGHT	总重 TOTAL WGHT	备注 NOTE
1	J526A0100	钢结构总布置图 structure arrangment	ASS.	1			
2	J526A0200	小车总成　Trolley arrangment	ASS.	1			
3	J526A0300	起升机构　Main hoist drive	ASS.	1			
4	J526A0400	小车牵引机构　Trolley drive	ASS.	1			
5	J526A0500	俯仰机构　Boom hoist drive	ASS.	1			
6	J526A0600	大车行走机构　Gantry drive	ASS.	4			
7	J526A1000	挂舱保护装置 Anti-snag andL/S/T device	ASS.	1			
8	J526A1200	吊具上架　headblock	ASS.	1			
9	J526A1300	吊钩横梁 cargo beam	ASS.	1 for 12 Cranes			
10	J526A1400	应急机构 Emergency drive	ASS.	1			
11	J526A1500	换绳机构　re-reeving device	ASS.	1			
12	J526A1600	机器房维修行车 machinery house sevice crane	ASS.	1			
13	J526A2000	起升缠绕系统　Main hoist rope reeving	ASS.	1			
14	J526A2100	小车缠绕系统　Trolley rope reeving	ASS.	1			
15	J526A2200	托架小车缠绕系统 Catenary trolley reeving	ASS.	1			
16	J526A2300	俯仰缠绕系统　Boom hoist reeving sys.	ASS.	1			
17	J526A3000	机器房　Machinery house	ASS.	1			
18	J526A3100	小车司机室　Operator's cab	ASS.	1			
19	J526A3200	大梁俯仰操作室　Boom hoist operator's cab	ASS.	1			
20	J526A3300	理货室室　Checker's cab	ASS.	1			
21	J526A4000	整机高压供电系统 High voltage cable supply sys	ASS.	1			
22	J526A4100	小车电缆输送系统 Slip contact sys.	ASS.	1			
23	J526A5000	梯子平台stairway and walking and ladder	ASS.	1			
24	J526A5100	电梯　Elevator	ASS.	1			
25	J526A6000	锚定装置 Anchor device	ASS.	1			
26	J526A6100	防风系固装置　Tie down device	ASS.	1			
27	J526A6200	大梁固定装置　Boom stowage device	ASS.	1			
28	J526A6300	大梁防碰装置　Boom anti -collision	ASS.	1			
29	J526A7000	空压机 Air compressor	ASS.	1			

明 细 表
SUBSIDIARY LIST

*The quantity and weight of this list is to one set
*此表为一套的数量和重量

____set套/crane台,____/set套,　　/crane台

设计(des)：

校对(chk)：

PROJECT NAME or CODE: Sri Lanka CICT 12 STS Cranes			SUB-PART NAME: 起重机总图 Crane general arrangement			SUB DRAW NO: J526A00	
序号 NO.	图号或标准 SUB-NO. or STDD	名称、规格或型号 NAME/SIZE/STYLE	材料 MTRL	数量 Q'TY	单重 EACH WGHT	总重 TOTAL WGHT	备注 NOTE
30	J526A7100	室外维修行车　service crane outdoor	ASS.	1			
31	J526A7200	整机润滑系统　Layout of lubrication sys.	ASS.	1			
32	J526A7300	整机铭牌　Nameplate.	ASS.	1			
33	J526A7400	整机限位系统 limit switch sys.	ASS.	1			
34	DT1500F	吊具拖车 Spreader trailer	ASS.	4 for 12 Cranes			
35	STS45	吊具　spreader	ASS.	(12+4)for 12 cranes			Bromma
36	ZM2-16530-00－J526A	试重箱 Dry test weight	ASS.	1 for 12 Cranes			
37	J526A-M00	预埋件 Embeded parts	ASS.	16 for 12 Cranes			